



CO
CO

ARKOSLIGHT



Kompakt und Leistungsstark

LED der neuen Generation. **154lm/W**
Lichteffizienz. Ein kompakter Aluminiumzylinder
mit einem Lichtstrom von **1340 lm**.




Bewegungsfreiheit

360° Drehung und **90°** Neigung.



COCO

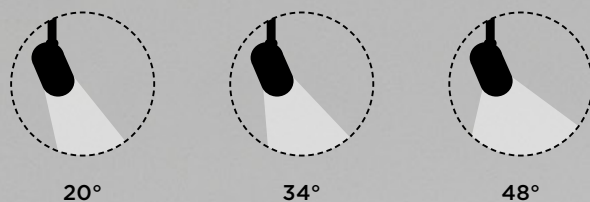


COCO 48V TUNABLE WHITE



Beleuchtungsfreiheit

Drei Öffnungswinkel **spot** / **medium** / **flood** + **Super spot Version 12°**.
Deckt verschiedene Bedürfnisse ab: Akzentbeleuchtung, allgemeine Beleuchtung...

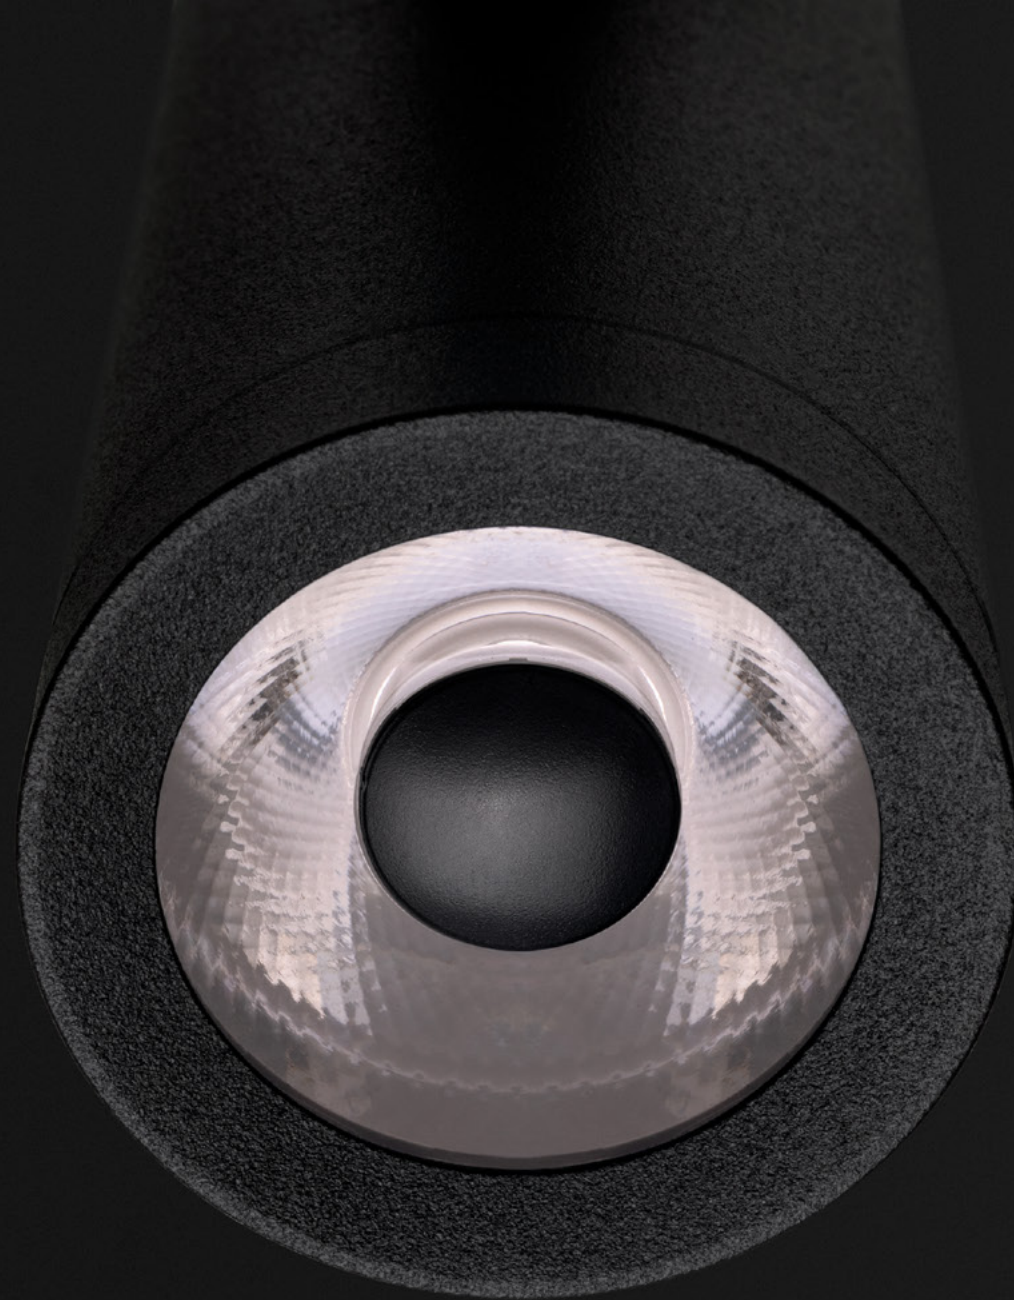

Coco Super Spot

Hochtechnisch (**Beam 12°**). Sorgfältig ausgewählte LED und Linsen von hoher Qualität. Bietet einen gleichmäßigen Lichtstrom und angenehme Blendungsniveaus.

DIM on board Option

Perfekte Integration für 48V-Systeme.
Ermöglicht eine unabhängige Regelung der
Intensität jeder Leuchte von **0** bis **100**.



Zubehör

Verschiedene Zubehörteile erhältlich:
Anti-Glare-Honeycomb und **Anti-Glare-Screen**,
die die Blendung reduzieren und den
visuellen Komfort fördern.



COCO ANTI-GLARE SCREEN



COCO ANTI-GLARE
HONEYCOMB LOUVER







Linear Filter

Verwandelt den kreisförmigen Lichtstrahl in eine **lineare Form**. Ideal für Anwendungen, bei denen eine präzise und lineare Lichtverteilung benötigt wird.



MAGNETIC 24V COCO

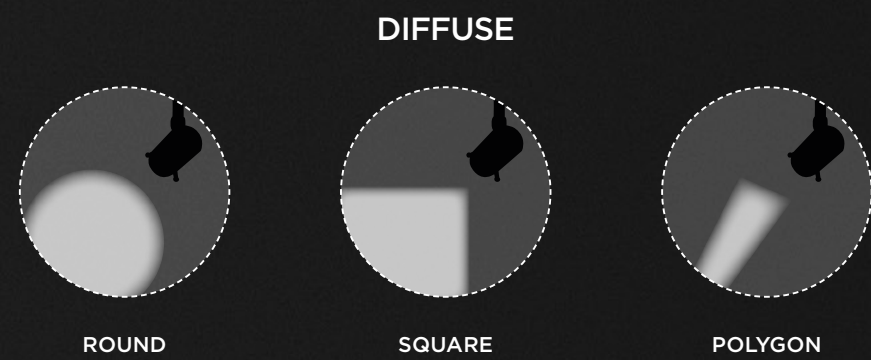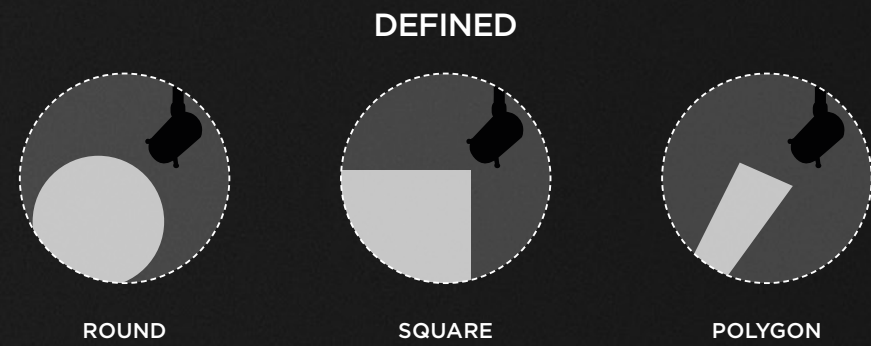

Coco Shaper

Einzigartige Szenografien, indem es die gewünschte geometrische Kontur projiziert: Kreise, quadratische oder dreieckige Polygone.



8:20h · 3700K



12:00h · 5000K



17:00h · 2700K

Tunable white


Verfügbar für Coco 48V. Sehr geschätzt in Wohn-, Gastgewerbe-, Büro-Umgebungen, etc.

COCO
TECHNISCHE
SPEZIFIKATIONEN






MAGNETIC 24V COCO




OPTIONAL ACCESSORIES

COCO Anti-glare Honeycomb Louver**

A498-90-00- | WT | NT |



NOT SOLD SEPARATELY



COCO Linear Filter**

A498-90-02- | WT | NT |




SUITABLE FOR BEAM ≤ 34°
NOT SOLD SEPARATELY

COCO Anti-glare Screen**

A498-90-01- | WT | NT |



NOT SOLD SEPARATELY



COCO High Chromatic Led** ⓘ » 281

NOT SOLD SEPARATELY

		P	CCT	Beam	I	Flux	LOR
MAGNETIC 24V COCO	A499-00-10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A499-00-11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A499-00-12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A499-00-20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A499-00-21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A499-00-22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A499-00-30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A499-00-31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A499-00-32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%


24 V | ⓘ IP20 | CRI>90 | L80B10 > 66.000h













		P	CCT	Beam	I	Flux	LOR
MAGNETIC 24V COCO Super Spot	A499-00-00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A499-00-01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A499-00-02- WT NT	6W	4000K	12°	500mA	850 lm	66%

24 V | ⓘ IP20 | CRI>90 | L80B10 > 95.000h















MAGNETIC 24V CONNECTOR A435-01-00 | W | N |


* MANDATORY FOR INSTALLATION ⓘ IP20 | ⓘ Ø16



Ø34


27






61

63




Ø36

INCLUDED EXTRA COVER FOR RECESSED VERSION

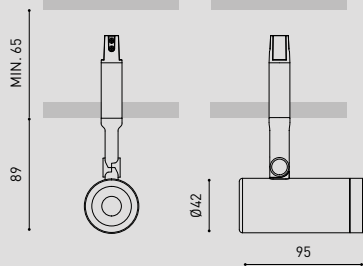


		P	V	D (A x B x C)
24V POWER SUPPLY	0434-01-37	60W	24V	180 x 52 x 30mm
	0433-10-22	100W	24V	295 x 43 x 30mm

220-240 V~ | MUST BE PLACED ON REMOTE



24V DIMMER	0433-01-32	DALI / Push	24V	181 x 42 x 20mm
	0433-01-33	CASAMBI	24V	172 x 42 x 20mm
	0434-01-64	WIFI	24V	105 x 44 x 23mm

24 V | MUST BE PLACED ON REMOTE
OTHER DIM OPTIONS PLEASE CONSULT ⓘ DROP VOLTAGE » 287



COLOUR | WT □ | NT ■ | MATERIAL |  AL |  PC/PMMA | PLEASE CONSULT » ⓘ

OTHER CCT OPTIONS PLEASE CONSULT
** AFFECTS THE LIGHTING PARAMETERS



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



SUITABLE FOR BEAM ≤ 34°

COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO High Chromatic Led ⓘ » 281

COCO RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO Recessed	A530-0- ⌘ -10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A530-0- ⌘ -11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A530-0- ⌘ -12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A530-0- ⌘ -20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A530-0- ⌘ -21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A530-0- ⌘ -22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A530-0- ⌘ -30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A530-0- ⌘ -31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A530-0- ⌘ -32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

220
240 V~ | IP20 | CRI>90 | L80B10 >66.000 h

MacAdam Step 2

OPTIONS*

INCL

Ø50

350°

90°

20° / 34° / 48°

		P	CCT	Beam	I	Flux	LOR
COCO Recessed Super Spot	A530-0- ⌘ -00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A530-0- ⌘ -01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A530-0- ⌘ -02- WT NT	6W	4000K	12°	500mA	850 lm	66%

220
240 V~ | IP20 | CRI>90 | L80B10 >55.000 h

MacAdam Step 2

OPTIONS*

INCL

Ø50

350°

90°

12°

		P	CCT	Beam	I	Flux	LOR
COCO Recessed Tunable White	A530-12-18- WT NT	8,5W	2700-5000K	28°	500mA	1010 lm	85%
	A530-12-28- WT NT	8,5W	2700-5000K	42°	500mA	1010 lm	87%
	A530-12-38- WT NT	8,5W	2700-5000K	54°	500mA	1010 lm	84%

220
240 V~ | IP20 | CRI>90 | L80B10 >55.000 h

MacAdam Step 3

DALI+

INCL


Ø50

350°

90°

28° / 42° / 54°

⌘	*OPTIONS
2	DIM DALI
5	DIM PHASE CUT
7	DIM ON BOARD

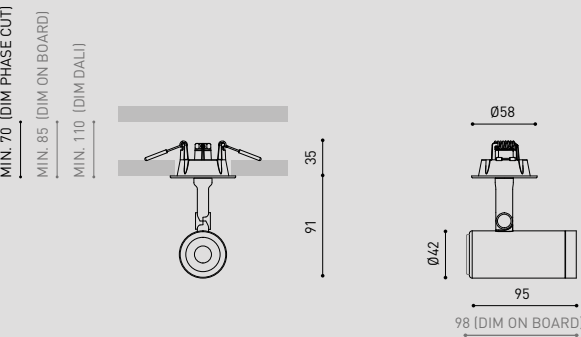



COCO 48V

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |




COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



COCO High Chromatic Led

i » 281

FINISHING	Lamp	Adaptor
WT	WT □	N ■
NT	NT ■	N ■
WTW	WT □	W □
NTW	NT ■	W □

COCO 48V	+RE	P	CCT	Beam	I	Flux	LOR
A498-0- Ⓢ -10- WT NT WTW NTW -S		8,7W	2700K	20°	500mA	1200 lm	87%
A498-0- Ⓢ -11- WT NT WTW NTW -S		8,7W	3000K	20°	500mA	1250 lm	87%
A498-0- Ⓢ -12- WT NT WTW NTW -S		8,7W	4000K	20°	500mA	1340 lm	87%
A498-0- Ⓢ -20- WT NT WTW NTW -S		8,7W	2700K	34°	500mA	1200 lm	89%
A498-0- Ⓢ -21- WT NT WTW NTW -S		8,7W	3000K	34°	500mA	1250 lm	89%
A498-0- Ⓢ -22- WT NT WTW NTW -S		8,7W	4000K	34°	500mA	1340 lm	89%
A498-0- Ⓢ -30- WT NT WTW NTW -S		8,7W	2700K	48°	500mA	1200 lm	86%
A498-0- Ⓢ -31- WT NT WTW NTW -S		8,7W	3000K	48°	500mA	1250 lm	86%
A498-0- Ⓢ -32- WT NT WTW NTW -S		8,7W	4000K	48°	500mA	1340 lm	86%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >66.000h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

360°

90°

20° / 34° / 48°

COCO 48V Super Spot	+RE	P	CCT	Beam	I	Flux	LOR
A498-0- Ⓢ -00- WT NT WTW NTW -S		6W	2700K	12°	500mA	750 lm	66%
A498-0- Ⓢ -01- WT NT WTW NTW -S		6W	3000K	12°	500mA	800 lm	66%
A498-0- Ⓢ -02- WT NT WTW NTW -S		6W	4000K	12°	500mA	850 lm	66%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >95.000h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

360°

90°

12°

COCO 48V Tunable White	+RE	P	CCT	Beam	I	Flux	LOR
A498-12-18- WT NT WTW NTW -S		8,5W	2700-5000K	28°	500mA	1010 lm	85%
A498-12-28- WT NT WTW NTW -S		8,5W	2700-5000K	42°	500mA	1010 lm	87%
A498-12-38- WT NT WTW NTW -S		8,5W	2700-5000K	54°	500mA	1010 lm	84%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >95.000h

MacAdam Step 3

DALI*

INCL

TRACK 48V

360°


90°

28° / 42° / 54°

Ⓢ	*OPTIONS
1	No DIM
2	DIM DALI
7	DIM ON BOARD

+RE	REF. ENDING	EXAMPLE
Ⓢ	Track 48V	A4980110WT
-S	Track 48V Short	A4980110WT-S

OTHER DIM OPTIONS PLEASE CONSULT

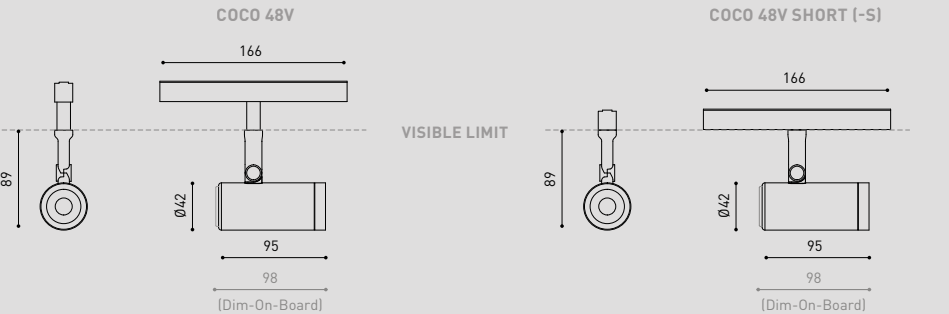

COLOUR | WT □ | NT ■ | MATERIAL | AL | PC/PMMA | PLEASE CONSULT »

OTHER CCT PLEASE CONSULT
+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

**OPTIONAL
ACCESSORIES**



COCO



COCO SUPER SPOT



COCO ANTI-GLARE HONEYCOMB LOUVER



COCO LINEAR FILTER



COCO ANTI-GLARE SCREEN

FINISHINGS



NT



WT



NTW



WTW



NT



WT



NT SUPER SPOT



WT SUPER SPOT



NT



WT



NT SUPER SPOT



WT SUPER SPOT

COCO SHAPER
48V

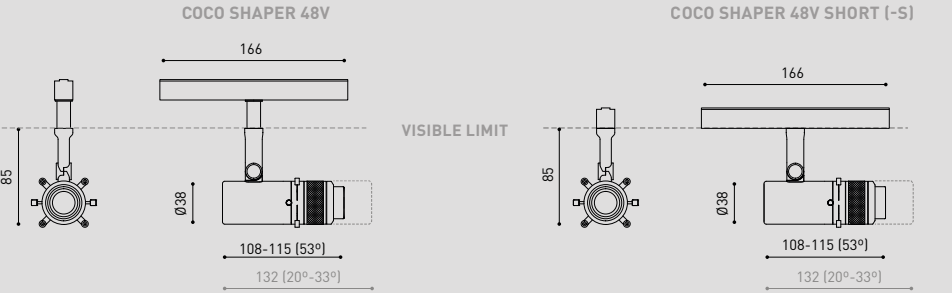


Table with 8 columns: COCO SHAPER 48V, +RE, P, CCT, Beam, I, Flux, LOR. It lists specifications for various models (A519-0-00 to A519-0-12) including power, color temperature, beam angle, luminous intensity, flux, and light output ratio.

Technical specifications and icons: 48 V, IP20, CRI>90, L80B10 >60,000h, MacAdam Step 2, OPTIONS*, INCL, TRACK 48V, 360°, 90°, 20° - 33° / 53°.

Table with 6 columns: *OPTIONS, +RE, REF. ENDING, EXAMPLE, FINISHING, Lamp, Adaptor. It details the configuration options for the lighting fixture, including finishing and adaptor choices.

OTHER DIM OPTIONS
PLEASE CONSULT




COLOUR | NT | MATERIAL | AL | OPTICAL GLASS | PLEASE CONSULT »

OTHER CCT PLEASE CONSULT
*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).
CUSTOM GOBO PLEASE CONSULT



COCO SHAPER RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO SHAPER Recessed	A519-1- ☯ -00- NT	6W	2700K	20°-33°	500mA	650 lm	40-38%
	A519-1- ☯ -01- NT	6W	3000K	20°-33°	500mA	680 lm	40-38%
	A519-1- ☯ -02- NT	6W	4000K	20°-33°	500mA	730 lm	40-38%
	A519-1- ☯ -10- NT	6W	2700K	53°	500mA	650 lm	37%
	A519-1- ☯ -11- NT	6W	3000K	53°	500mA	680 lm	37%
	A519-1- ☯ -12- NT	6W	4000K	53°	500mA	730 lm	37%

220
240 V~ |  IP20 | CRI>90 | L80B10
>60.000 h

 MacAdam
Step 2

 OPTIONS*

 INCL

 Ø50

 360°


 90°

 20° - 33° / 53°

☯ *OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS
PLEASE CONSULT

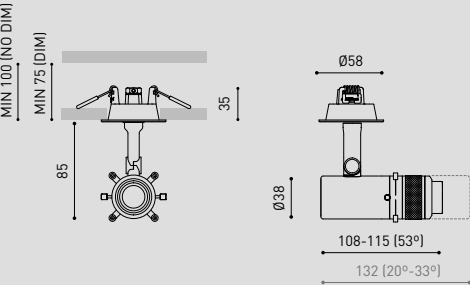

COLOUR | NT ■ | MATERIAL |  AL |  OPTICAL GLASS |

PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT
CUSTOM GOBO PLEASE CONSULT

BEAM & FINISHINGS



53° | NT




20°- 33° | NT



53° | NT



20°- 33° | NT



53° | NTW



20°- 33° | NTW

CO
CO

by ARKOSLIGHT