



CO  
CO

ARKOSLIGHT



# Compacto y poderoso

Nueva generación LED. **154 lm/W**  
de eficacia lumínica. Un cilindro compacto en  
aluminio con un **flujo de 1340 lm**.






# Libertad de movimientos

Rotación de **360°** e inclinación de **90°**.



COCO

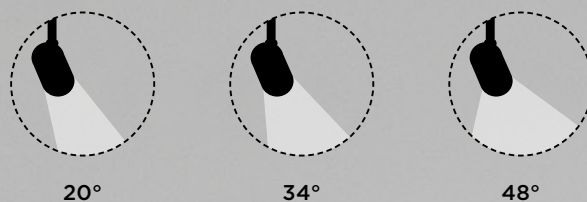

20°

34°

48°

COCO 48V TUNABLE WHITE



28°

42°

54°

# Libertad de iluminación

Tres ángulos de apertura **spot** / **medium** / **flood** + versión **Super spot 12°**.  
Cubre múltiples necesidades: iluminación de acento, general...





# Coco Super Spot

Altamente técnico (**12° apertura de haz de luz**).  
LED y lentes de alta calidad cuidadosamente seleccionadas.  
Mantiene un flujo uniforme y un marcado confort visual.



# Opción DIM on board

Integración perfecta para sistemas 48V.  
Permite regular de **0** a **100** la intensidad de  
cada luminaria de manera independiente.





# Accesorios


Dispone de diferentes accesorios:  
**anti-glare honeycomb** y  
**anti-glare screen**, que reducen  
el deslumbramiento y favorecen el  
confort visual.



COCO ANTI-GLARE SCREEN



COCO ANTI-GLARE  
HONEYCOMB LOUVER

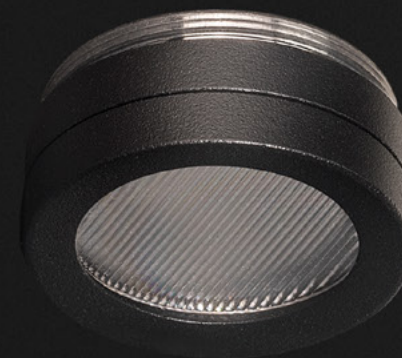



# Linear Filter



Transforma el haz de luz circular en una **forma lineal**.  
Ideal para aplicaciones donde se necesita una distribución  
precisa y lineal de la luz.





MAGNETIC 24V COCO



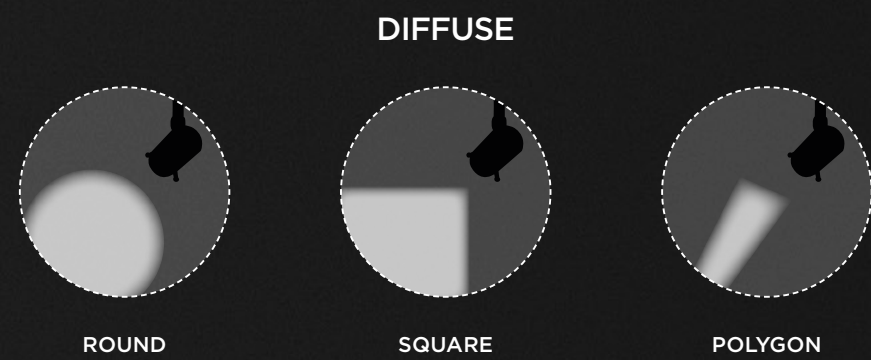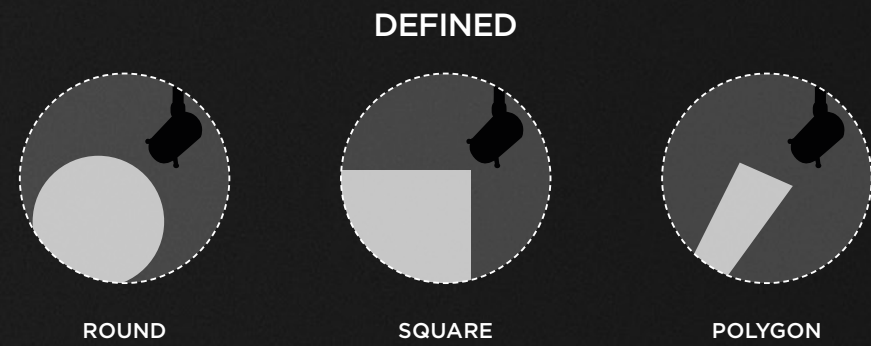

# Coco Shaper

Crea escenografías únicas proyectando el contorno geométrico deseado: circunferencias, polígonos cuadriláteros o triangulares.





8:20h · 3700K



12:00h · 5000K



17:00h · 2700K

# Tunable white

Versión disponible para Coco 48V. Muy apreciado en ambientes domésticos, hostelería, oficina, etc.





**COCO**  
ESPECIFICACIONES  
TÉCNICAS






# MAGNETIC 24V COCO

### OPTIONAL ACCESSORIES


#### COCO Anti-glare Honeycomb Louver\*\*

A498-90-00- | WT | NT |




#### COCO Linear Filter\*\*

A498-90-02- | WT | NT |



#### COCO Anti-glare Screen\*\*

A498-90-01- | WT | NT |




#### COCO High Chromatic Led\*\* ⓘ » 281

NOT SOLD SEPARATELY


#### TRIMLESS TOOL D16 X D34mm

A478-00-00



		P	CCT	Beam	I	Flux	LOR
MAGNETIC 24V COCO	A499-00-10-   WT   NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A499-00-11-   WT   NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A499-00-12-   WT   NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A499-00-20-   WT   NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A499-00-21-   WT   NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A499-00-22-   WT   NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A499-00-30-   WT   NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A499-00-31-   WT   NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A499-00-32-   WT   NT	8,7W	4000K	48°	500mA	1340 lm	86%

24 V | ⓘ IP20 | CRI>90 | L80B10 > 66.000h





		P	CCT	Beam	I	Flux	LOR
MAGNETIC 24V COCO Super Spot	A499-00-00-   WT   NT	6W	2700K	12°	500mA	750 lm	66%
	A499-00-01-   WT   NT	6W	3000K	12°	500mA	800 lm	66%
	A499-00-02-   WT   NT	6W	4000K	12°	500mA	850 lm	66%

24 V | ⓘ IP20 | CRI>90 | L80B10 > 95.000h




### MAGNETIC 24V CONNECTOR A435-01-00 | W | N |

\* MANDATORY FOR INSTALLATION

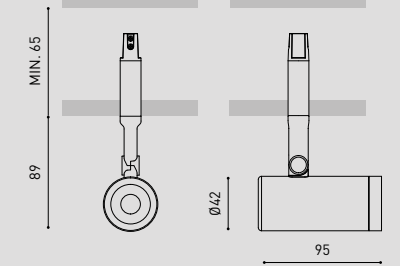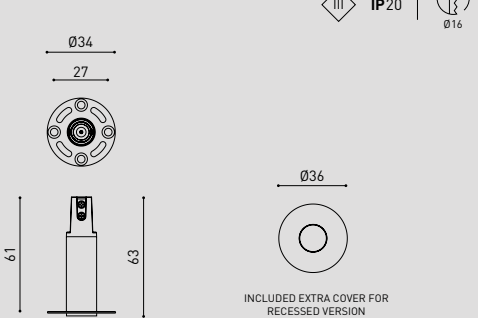


		P	V	D (A x B x C)
24V POWER SUPPLY	0434-01-37	60W	24V	180 x 52 x 30mm
	0433-10-22	100W	24V	295 x 43 x 30mm

220-240 V~ | MUST BE PLACED ON REMOTE



24V DIMMER	0433-01-32	DALI / Push	24V	181 x 42 x 20mm
	0433-01-33	CASAMBI	24V	172 x 42 x 20mm
	0434-01-64	WIFI	24V	105 x 44 x 23mm

24 V | MUST BE PLACED ON REMOTE OTHER DIM OPTIONS PLEASE CONSULT ⓘ DROP VOLTAGE » 287



COLOUR | WT □ | NT ■ | MATERIAL | AL | PC/PMMA | PLEASE CONSULT » ⓘ

OTHER CCT OPTIONS PLEASE CONSULT  
\*\* AFFECTS THE LIGHTING PARAMETERS





OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS  
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



SUITABLE FOR BEAM ≤ 34°

COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO High Chromatic Led ⓘ » 281

COCO RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO Recessed	A530-0- ⌘ -10-   WT   NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A530-0- ⌘ -11-   WT   NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A530-0- ⌘ -12-   WT   NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A530-0- ⌘ -20-   WT   NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A530-0- ⌘ -21-   WT   NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A530-0- ⌘ -22-   WT   NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A530-0- ⌘ -30-   WT   NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A530-0- ⌘ -31-   WT   NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A530-0- ⌘ -32-   WT   NT	8,7W	4000K	48°	500mA	1340 lm	86%

220  
240 V~ |  IP20 | CRI>90 | L80B10  
>66.000 h

 MacAdam  
Step 2

 OPTIONS\*

 INCL

 Ø50

 350°

 90°

 20° / 34° / 48°

		P	CCT	Beam	I	Flux	LOR
COCO Recessed Super Spot	A530-0- ⌘ -00-   WT   NT	6W	2700K	12°	500mA	750 lm	66%
	A530-0- ⌘ -01-   WT   NT	6W	3000K	12°	500mA	800 lm	66%
	A530-0- ⌘ -02-   WT   NT	6W	4000K	12°	500mA	850 lm	66%

220  
240 V~ |  IP20 | CRI>90 | L80B10  
>55.000 h

 MacAdam  
Step 2

 OPTIONS\*

 INCL

 Ø50

 350°

 90°

 12°

		P	CCT	Beam	I	Flux	LOR
COCO Recessed Tunable White	A530-12-18-   WT   NT	8,5W	2700-5000K	28°	500mA	1010 lm	85%
	A530-12-28-   WT   NT	8,5W	2700-5000K	42°	500mA	1010 lm	87%
	A530-12-38-   WT   NT	8,5W	2700-5000K	54°	500mA	1010 lm	84%

220  
240 V~ |  IP20 | CRI>90 | L80B10  
>55.000 h

 MacAdam  
Step 3

 DALI+

 INCL


 Ø50

 350°

 90°

 28° / 42° / 54°

⌘	*OPTIONS
2	DIM DALI
5	DIM PHASE CUT
7	DIM ON BOARD

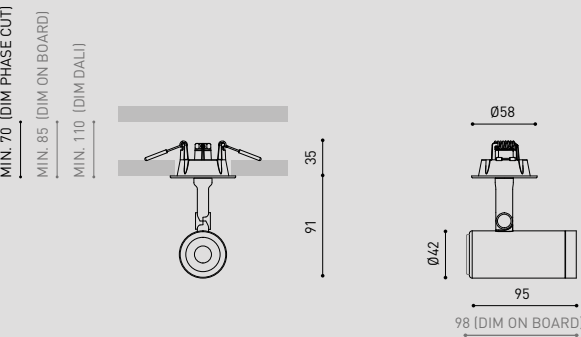





# COCO 48V

### OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS  
NOT SOLD SEPARATELY

#### COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |




#### COCO Anti-glare Screen

A498-90-01- | WT | NT |



#### COCO Linear Filter

A498-90-02- | WT | NT |



#### COCO High Chromatic Led

» 281

### FINISHING

	Lamp	Adaptor
WT	WT □	N ■
NT	NT ■	N ■
WTW	WT □	W □
NTW	NT ■	W □

COCO 48V	+RE	P	CCT	Beam	I	Flux	LOR
A498-0- Ⓢ -10-   WT   NT   WTW   NTW   -S		8,7W	2700K	20°	500mA	1200 lm	87%
A498-0- Ⓢ -11-   WT   NT   WTW   NTW   -S		8,7W	3000K	20°	500mA	1250 lm	87%
A498-0- Ⓢ -12-   WT   NT   WTW   NTW   -S		8,7W	4000K	20°	500mA	1340 lm	87%
A498-0- Ⓢ -20-   WT   NT   WTW   NTW   -S		8,7W	2700K	34°	500mA	1200 lm	89%
A498-0- Ⓢ -21-   WT   NT   WTW   NTW   -S		8,7W	3000K	34°	500mA	1250 lm	89%
A498-0- Ⓢ -22-   WT   NT   WTW   NTW   -S		8,7W	4000K	34°	500mA	1340 lm	89%
A498-0- Ⓢ -30-   WT   NT   WTW   NTW   -S		8,7W	2700K	48°	500mA	1200 lm	86%
A498-0- Ⓢ -31-   WT   NT   WTW   NTW   -S		8,7W	3000K	48°	500mA	1250 lm	86%
A498-0- Ⓢ -32-   WT   NT   WTW   NTW   -S		8,7W	4000K	48°	500mA	1340 lm	86%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >66.000 h

MacAdam Step 2

OPTIONS\*

INCL

TRACK 48V

360°

90°

20° / 34° / 48°

COCO 48V Super Spot	+RE	P	CCT	Beam	I	Flux	LOR
A498-0- Ⓢ -00-   WT   NT   WTW   NTW   -S		6W	2700K	12°	500mA	750 lm	66%
A498-0- Ⓢ -01-   WT   NT   WTW   NTW   -S		6W	3000K	12°	500mA	800 lm	66%
A498-0- Ⓢ -02-   WT   NT   WTW   NTW   -S		6W	4000K	12°	500mA	850 lm	66%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >95.000 h

MacAdam Step 2

OPTIONS\*

INCL

TRACK 48V

360°

90°

12°

COCO 48V Tunable White	+RE	P	CCT	Beam	I	Flux	LOR
A498-12-18-   WT   NT   WTW   NTW   -S		8,5W	2700-5000K	28°	500mA	1010 lm	85%
A498-12-28-   WT   NT   WTW   NTW   -S		8,5W	2700-5000K	42°	500mA	1010 lm	87%
A498-12-38-   WT   NT   WTW   NTW   -S		8,5W	2700-5000K	54°	500mA	1010 lm	84%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >95.000 h

MacAdam Step 3

DALI\*

INCL

TRACK 48V


360°

90°

28° / 42° / 54°

Ⓢ	*OPTIONS	+RE	REF. ENDING	EXAMPLE
1	No DIM	Ø	Track 48V	A4980110WT
2	DIM DALI	-S	Track 48V Short	A4980110WT-S
7	DIM ON BOARD			

OTHER DIM OPTIONS PLEASE CONSULT

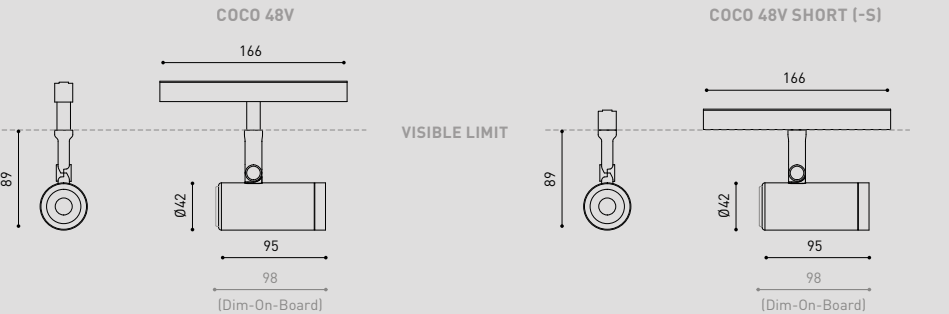

COLOUR | WT □ | NT ■ | MATERIAL | AL | PC/PMMA | PLEASE CONSULT »

OTHER CCT PLEASE CONSULT  
+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE  
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).



# OPTIONAL ACCESSORIES



COCO



COCO SUPER SPOT



COCO ANTI-GLARE HONEYCOMB LOUVER



COCO LINEAR FILTER



COCO ANTI-GLARE SCREEN



# FINISHINGS



NT



WT



NTW



WTW



NT



WT



NT SUPER SPOT



WT SUPER SPOT



NT



WT



NT SUPER SPOT




WT SUPER SPOT







# COCO SHAPER 48V




COCO SHAPER 48V							+RE	P	CCT	Beam	I	Flux	LOR	
A519-0-	⊗	-00-		NT		NTW		-S	6W	2700K	20°-33°	500mA	650 lm	40-38%
A519-0-	⊗	-01-		NT		NTW		-S	6W	3000K	20°-33°	500mA	680 lm	40-38%
A519-0-	⊗	-02-		NT		NTW		-S	6W	4000K	20°-33°	500mA	730 lm	40-38%
A519-0-	⊗	-10-		NT		NTW		-S	6W	2700K	53°	500mA	650 lm	37%
A519-0-	⊗	-11-		NT		NTW		-S	6W	3000K	53°	500mA	680 lm	37%
A519-0-	⊗	-12-		NT		NTW		-S	6W	4000K	53°	500mA	730 lm	37%





48 V |  IP20 | CRI>90 | L80B10 >60.000 h

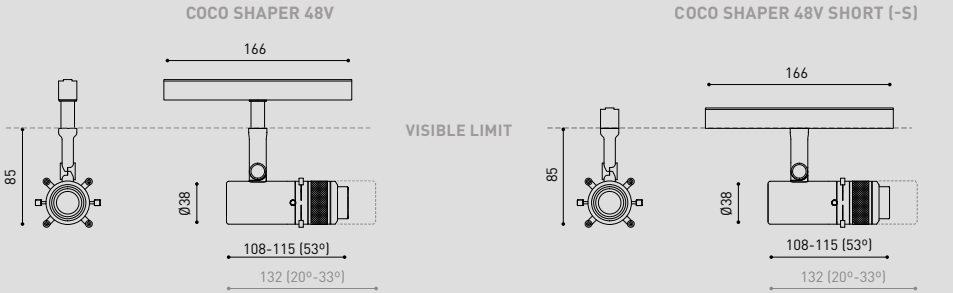

⊗	*OPTIONS	+RE	REF. ENDING	EXAMPLE	FINISHING	Lamp	Adaptor
1	No DIM	Ø	Track 48V	A5190110NT	NT	NT    N 	
2	DIM DALI	-S	Track 48V Short	A5190110NT-S	NTW	NT    W 	

OTHER DIM OPTIONS  
PLEASE CONSULT



COLOUR | NT  | MATERIAL |  AL |  OPTICAL GLASS | PLEASE CONSULT » 


OTHER CCT PLEASE CONSULT  
\*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE  
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).  
CUSTOM GOBO PLEASE CONSULT





# COCO SHAPER RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO SHAPER Recessed	A519-1- ☯ -00-   NT	6W	2700K	20°-33°	500mA	650 lm	40-38%
	A519-1- ☯ -01-   NT	6W	3000K	20°-33°	500mA	680 lm	40-38%
	A519-1- ☯ -02-   NT	6W	4000K	20°-33°	500mA	730 lm	40-38%
	A519-1- ☯ -10-   NT	6W	2700K	53°	500mA	650 lm	37%
	A519-1- ☯ -11-   NT	6W	3000K	53°	500mA	680 lm	37%
	A519-1- ☯ -12-   NT	6W	4000K	53°	500mA	730 lm	37%


220  
240 V~ |  IP20 | CRI>90 | L80B10  
>60.000 h



☯ \*OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS  
PLEASE CONSULT

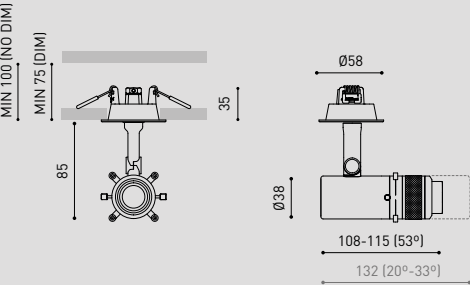

COLOUR | NT ■ | MATERIAL |  AL |  OPTICAL GLASS |

PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT  
CUSTOM GOBO PLEASE CONSULT

# BEAM & FINISHINGS



53° | NT



20°- 33° | NT



53° | NT



20°- 33° | NT



53° | NTW



20°- 33° | NTW



CO  
CO

by ARKOSLIGHT