




DIMENSIONS



AWARDS

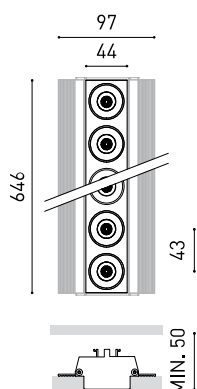

Name	BLACK FOSTER TRI 15 SPOT DIM DALI 3500K NMG
Reference	A3186143NMG
Color	Matt black-Metallized gold
RAL	Metalllic finish
Category	CEILING RECESSED

PRODUCT

Type	LED
Gross luminous flux	3450 lm
Colour temperature	3500 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	31,5 W
Current	700 mA
Efficacy	110 lm/W
LED lifespan	L90B10 >102.000h

LIGHT SOURCE

Lighting efficiency	90%
Light beam angle	19°

LIGHTING FIXTURE | PHOTOMETRIC DATA

Driver	Included - Remote
Power values of the system	35,51 W
Voltage	220V/240V
Frecuency	50/60 Hz
Dimming	DALI
Electrical insulation class	<input type="checkbox"/>

LIGHTING FIXTURE | ELECTRICAL DATA


Sealing	IP20
Wireless control	Please Consult
Emergency power supply	Please Consult
Recess measurements	50 x 652 mm
Weight	1130 g
Packaged weight	1610 g
Packaging dimensions	Ø105 x 830 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA



Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

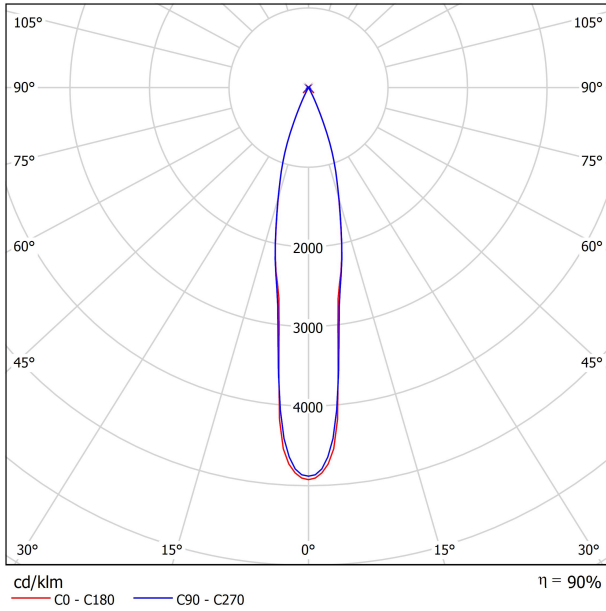

CONICAL DIAGRAM



UGR

Valoración de deslumbramiento según UGR																
		70					50					30				
p Techo		70	70	50	50	30	70	70	50	50	30	70	70	50	50	30
p Paredes		50	30	50	30	30	50	30	50	30	30	50	30	50	30	30
p Suelo		20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
Tamaño del local		Mirado en perpendicular al eje de lámpara					Mirado longitudinalmente al eje de lámpara									
X	Y															
2H	2H	3.2	3.8	3.4	4.0	4.2	3.6	4.3	3.9	4.5	4.7					
	3H	6.4	7.0	6.6	7.2	7.4	7.1	7.7	7.4	8.0	8.2					
	4H	8.2	8.8	8.5	9.0	9.3	9.1	9.6	9.4	9.9	10.2					
	6H	10.3	10.8	10.6	11.1	11.4	11.3	11.8	11.6	12.1	12.4					
	8H	11.4	11.9	11.7	12.2	12.5	12.5	13.0	12.9	13.3	13.6					
4H	2H	12.7	13.2	13.1	13.5	13.8	14.0	14.4	14.3	14.7	15.1					
	3H	4.4	5.0	4.7	5.2	5.5	4.7	5.3	5.0	5.6	5.8					
	4H	7.8	8.3	8.2	8.6	8.9	8.4	8.9	8.8	9.2	9.5					
	6H	9.8	10.2	10.2	10.6	10.9	10.5	10.9	10.9	11.3	11.6					
	8H	12.0	12.4	12.4	12.7	13.1	12.9	13.3	13.3	13.6	14.0					
8H	2H	13.2	13.5	13.6	13.9	14.3	14.2	14.5	14.6	14.9	15.3					
	3H	14.6	14.9	15.1	15.3	15.7	15.8	16.0	16.2	16.4	16.9					
	4H	10.7	11.1	11.2	11.4	11.8	11.3	11.6	11.7	12.0	12.4					
	6H	13.1	13.4	13.6	13.8	14.2	13.9	14.1	14.3	14.5	15.0					
	8H	14.5	14.7	15.0	15.1	15.6	15.4	15.6	15.8	16.0	16.5					
12H	2H	16.1	16.3	16.6	16.8	17.3	17.1	17.3	17.6	17.7	18.2					
	4H	11.0	11.3	11.4	11.7	12.1	11.5	11.7	11.9	12.1	12.6					
	6H	13.5	13.7	13.9	14.1	14.6	14.1	14.3	14.6	14.8	15.2					
	8H	15.0	15.2	15.5	15.6	16.1	15.8	15.9	16.3	16.4	16.9					
Variación de la posición del espectador para separaciones S entre luminarias																
S = 1.0H		+0.2 / -0.1					+0.2 / -0.1									
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3									
S = 2.0H		+0.5 / -0.5					+0.5 / -0.5									
Tabla estándar		---					---									
Sumando de corrección		---					---									
Índice de deslumbramiento corregido en relación a 3450lm Flujo luminoso total																

GUÍA DE INSTALACIÓN



<https://youtu.be/tgGsQdaYe-w>



Fuente de luz (LED) reemplazable por un profesional autorizado
 Replaceable (LED only) light source by an authorized professional.
 Source lumineuse (LED) remplaçable par un professionnel agréé
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado
 Replaceable control gear by an authorized professional
 Dispositif de commande remplaçable par un professionnel agréé
 Alimentatore sostituibile da parte di un professionista autorizzato
 Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

