



CO
CO

ARKOSLIGHT



Compacte et puissante

Une nouvelle génération LED avec **154 lm/W**
d'efficacité lumineuse. Le coco est un cylindre compact
en aluminium avec un **flux de 1340 lm**.



Liberté de mouvement

Rotation à **360°** et inclinaison à **90°**.



COCO



20°



34°



48°

COCO 48V TUNABLE WHITE



28°



42°



54°

Liberté d'éclairage

Avec trois angles d'ouverture, **spot** / **medium** / **flood** + version **Super spot 12°**.
Le coco couvre de nombreux besoins : éclairage d'accentuation, général...




Coco Super Spot

Hautement technique (**Faisceau 12°**). LED et lentilles de haute qualité soigneusement sélectionnées. Il maintient un flux lumineux uniforme et des niveaux de glare confortables.

Option DIM intégrée

Une intégration parfaite pour les systèmes 48V.
Cette option permet de réguler de **0** à **100** l'intensité
de chaque luminaire de manière indépendante.

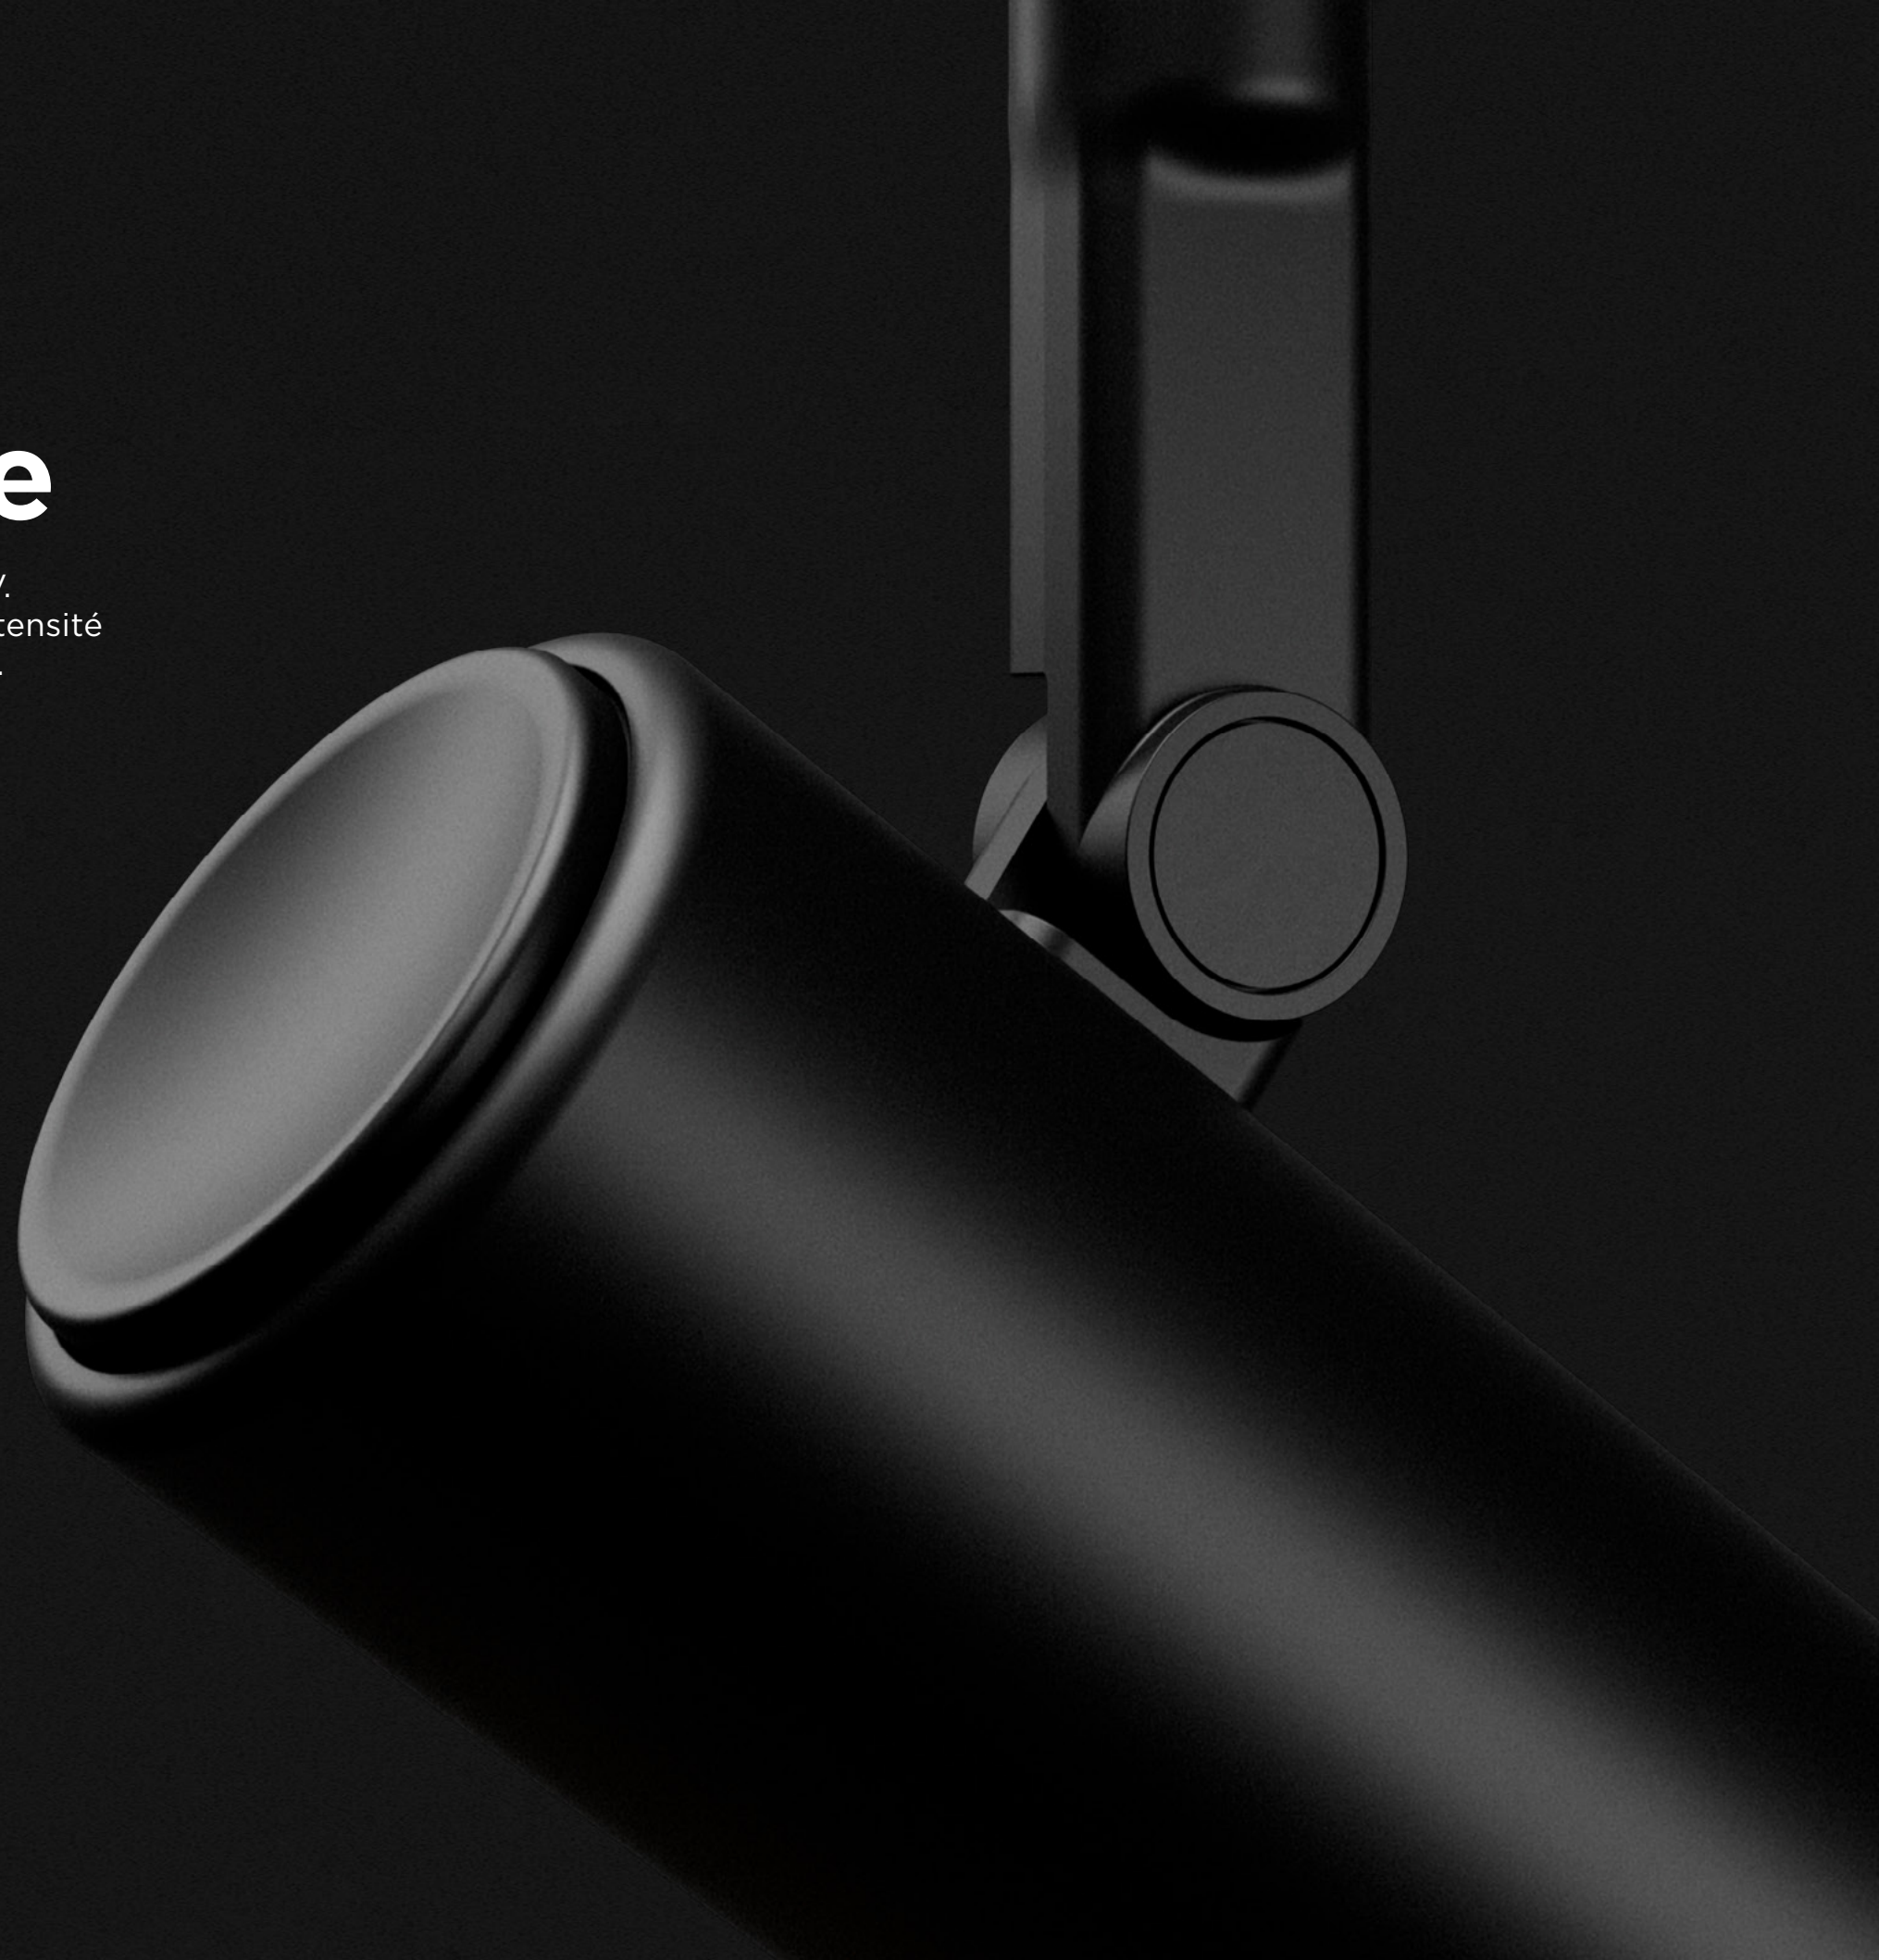

Accessoires

A disposition différents accessoires :
anti-glare honeycomb et **anti-glare screen**,
qui réduisent l'éblouissement et
favorisent le confort visuel.



COCO ANTI-GLARE SCREEN



COCO ANTI-GLARE
HONEYCOMB LOUVER







Linear Filter

Ce filtre transforme le faisceau lumineux circulaire en une **forme linéaire**. Idéal pour les applications nécessitant une distribution précise et linéaire de la lumière.



MAGNETIC 24V COCO

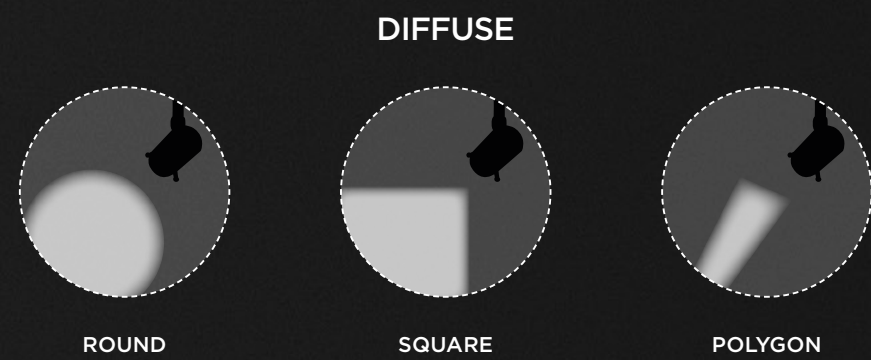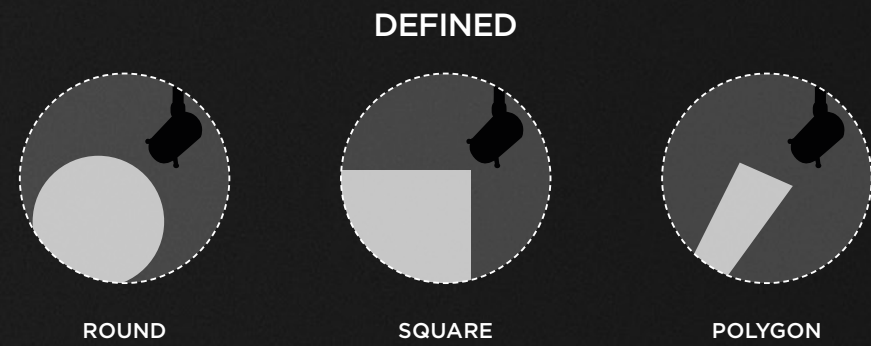

Coco Shaper

Crée des scénographies uniques en projetant le contour géométrique souhaité: des cercles, des polygones quadrilatères ou triangulaires.



8:20h · 3700K



12:00h · 5000K



17:00h · 2700K

Tunable white


Version disponible pour Coco 48V. Très apprécié dans les environnements domestiques, l'hôtellerie, les bureaux, etc.

COCO
SPÉCIFICATIONS
TECHNIQUES





MAGNETIC 24V COCO



OPTIONAL ACCESSORIES

COCO Anti-glare Honeycomb Louver**

A498-90-00- | WT | NT |



COCO Linear Filter**

A498-90-02- | WT | NT |



COCO Anti-glare Screen**

A498-90-01- | WT | NT |



COCO High Chromatic Led** ⓘ » 281

NOT SOLD SEPARATELY

TRIMLESS TOOL D16 X D34mm

A478-00-00

		P	CCT	Beam	I	Flux	LOR
MAGNETIC 24V COCO	A499-00-10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A499-00-11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A499-00-12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A499-00-20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A499-00-21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A499-00-22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A499-00-30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A499-00-31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A499-00-32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

24 V | ⓘ IP20 | CRI>90 | L80B10 > 66.000h

MacAdam Step 2

EXCL*

INCL

360°

90°

20° / 34° / 48°

		P	CCT	Beam	I	Flux	LOR
MAGNETIC 24V COCO Super Spot	A499-00-00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A499-00-01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A499-00-02- WT NT	6W	4000K	12°	500mA	850 lm	66%

24 V | ⓘ IP20 | CRI>90 | L80B10 > 95.000h

MacAdam Step 2

EXCL*

INCL



360°

90°

12°


MAGNETIC 24V CONNECTOR A435-01-00 | W | N |

* MANDATORY FOR INSTALLATION

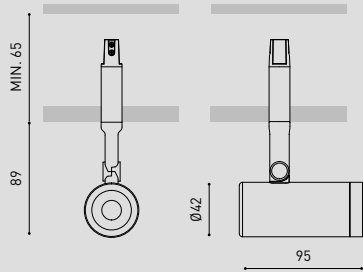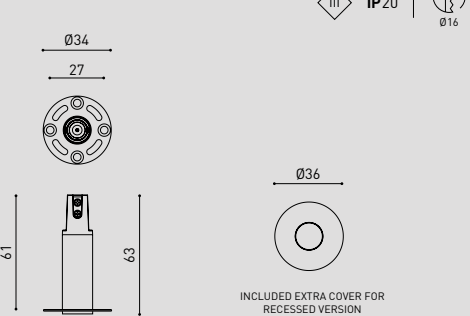


		P	V	D (A x B x C)
24V POWER SUPPLY	0434-01-37	60W	24V	180 x 52 x 30mm
	0433-10-22	100W	24V	295 x 43 x 30mm

220-240 V~ | MUST BE PLACED ON REMOTE



24V DIMMER	0433-01-32	DALI / Push	24V	181 x 42 x 20mm
	0433-01-33	CASAMBI	24V	172 x 42 x 20mm
	0434-01-64	WIFI	24V	105 x 44 x 23mm

24 V | MUST BE PLACED ON REMOTE OTHER DIM OPTIONS PLEASE CONSULT ⓘ DROP VOLTAGE » 287



COLOUR | WT □ | NT ■ | MATERIAL | AL | PC/PMMA | PLEASE CONSULT » ⓘ

OTHER CCT OPTIONS PLEASE CONSULT
** AFFECTS THE LIGHTING PARAMETERS



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



SUITABLE FOR BEAM ≤ 34°

COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO High Chromatic Led ⓘ » 281

COCO RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO Recessed	A530-0- ⌘ -10- WT NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A530-0- ⌘ -11- WT NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A530-0- ⌘ -12- WT NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A530-0- ⌘ -20- WT NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A530-0- ⌘ -21- WT NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A530-0- ⌘ -22- WT NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A530-0- ⌘ -30- WT NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A530-0- ⌘ -31- WT NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A530-0- ⌘ -32- WT NT	8,7W	4000K	48°	500mA	1340 lm	86%

220
240 V~

 IP20

CRi>90

L80B10
>66.000 h

 MacAdam
Step 2

 OPTIONS*

 INCL

 Ø50

 350°

 90°

 20° / 34° / 48°

		P	CCT	Beam	I	Flux	LOR
COCO Recessed Super Spot	A530-0- ⌘ -00- WT NT	6W	2700K	12°	500mA	750 lm	66%
	A530-0- ⌘ -01- WT NT	6W	3000K	12°	500mA	800 lm	66%
	A530-0- ⌘ -02- WT NT	6W	4000K	12°	500mA	850 lm	66%

220
240 V~

 IP20

CRi>90

L80B10
>55.000 h

 MacAdam
Step 2

 OPTIONS*

 INCL

 Ø50

 350°

 90°

 12°

		P	CCT	Beam	I	Flux	LOR
COCO Recessed Tunable White	A530-12-18- WT NT	8,5W	2700-5000K	28°	500mA	1010 lm	85%
	A530-12-28- WT NT	8,5W	2700-5000K	42°	500mA	1010 lm	87%
	A530-12-38- WT NT	8,5W	2700-5000K	54°	500mA	1010 lm	84%

220
240 V~

 IP20

CRi>90

L80B10
>55.000 h

 MacAdam
Step 3

 DALI+

 INCL


 Ø50

 350°

 90°

 28° / 42° / 54°

⌘	*OPTIONS
2	DIM DALI
5	DIM PHASE CUT
7	DIM ON BOARD

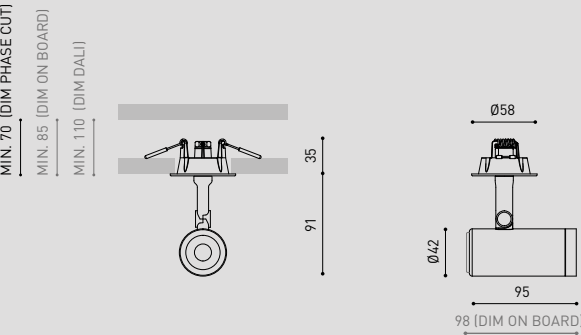



COCO 48V

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |




COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



COCO High Chromatic Led

i » 281

FINISHING	Lamp	Adaptor
WT	WT □	N ■
NT	NT ■	N ■
WTW	WT □	W □
NTW	NT ■	W □

COCO 48V	+RE	P	CCT	Beam	I	Flux	LOR
A498-0- Ⓢ -10- WT NT WTW NTW -S		8,7W	2700K	20°	500mA	1200 lm	87%
A498-0- Ⓢ -11- WT NT WTW NTW -S		8,7W	3000K	20°	500mA	1250 lm	87%
A498-0- Ⓢ -12- WT NT WTW NTW -S		8,7W	4000K	20°	500mA	1340 lm	87%
A498-0- Ⓢ -20- WT NT WTW NTW -S		8,7W	2700K	34°	500mA	1200 lm	89%
A498-0- Ⓢ -21- WT NT WTW NTW -S		8,7W	3000K	34°	500mA	1250 lm	89%
A498-0- Ⓢ -22- WT NT WTW NTW -S		8,7W	4000K	34°	500mA	1340 lm	89%
A498-0- Ⓢ -30- WT NT WTW NTW -S		8,7W	2700K	48°	500mA	1200 lm	86%
A498-0- Ⓢ -31- WT NT WTW NTW -S		8,7W	3000K	48°	500mA	1250 lm	86%
A498-0- Ⓢ -32- WT NT WTW NTW -S		8,7W	4000K	48°	500mA	1340 lm	86%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >66.000h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

360°

90°

20° / 34° / 48°

COCO 48V Super Spot	+RE	P	CCT	Beam	I	Flux	LOR
A498-0- Ⓢ -00- WT NT WTW NTW -S		6W	2700K	12°	500mA	750 lm	66%
A498-0- Ⓢ -01- WT NT WTW NTW -S		6W	3000K	12°	500mA	800 lm	66%
A498-0- Ⓢ -02- WT NT WTW NTW -S		6W	4000K	12°	500mA	850 lm	66%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >95.000h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

360°

90°

12°

COCO 48V Tunable White	+RE	P	CCT	Beam	I	Flux	LOR
A498-12-18- WT NT WTW NTW -S		8,5W	2700-5000K	28°	500mA	1010 lm	85%
A498-12-28- WT NT WTW NTW -S		8,5W	2700-5000K	42°	500mA	1010 lm	87%
A498-12-38- WT NT WTW NTW -S		8,5W	2700-5000K	54°	500mA	1010 lm	84%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >95.000h

MacAdam Step 3

DALI*

INCL

TRACK 48V

360°


90°

28° / 42° / 54°

Ⓢ	*OPTIONS
1	No DIM
2	DIM DALI
7	DIM ON BOARD

+RE	REF. ENDING	EXAMPLE
Ⓢ	Track 48V	A4980110WT
-S	Track 48V Short	A4980110WT-S

OTHER DIM OPTIONS PLEASE CONSULT

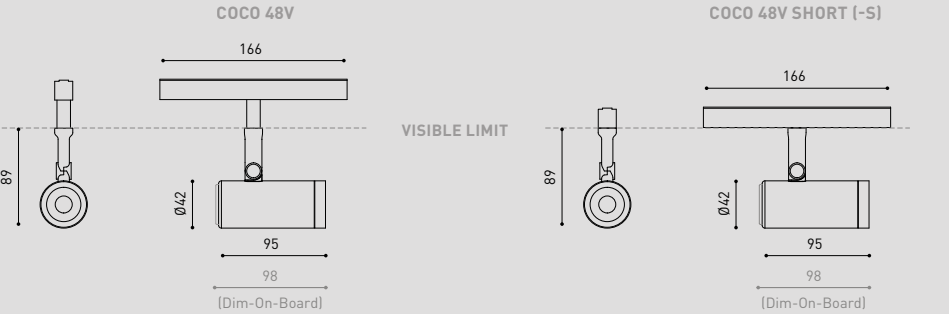

COLOUR | WT □ | NT ■ | MATERIAL | AL | PC/PMMA | PLEASE CONSULT »

OTHER CCT PLEASE CONSULT
+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

OPTIONAL ACCESSORIES



COCO



COCO SUPER SPOT



COCO ANTI-GLARE HONEYCOMB LOUVER



COCO LINEAR FILTER



COCO ANTI-GLARE SCREEN

FINISHINGS



NT



WT



NTW



WTW



NT



WT



NT SUPER SPOT



WT SUPER SPOT



NT



WT



NT SUPER SPOT



WT SUPER SPOT

COCO SHAPER
48V

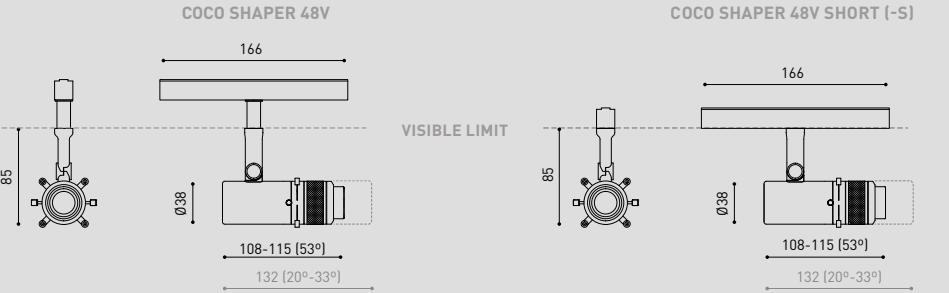


Table with 8 columns: COCO SHAPER 48V, +RE, P, CCT, Beam, I, Flux, LOR. It lists specifications for various models including A519-0-00, A519-0-01, A519-0-02, A519-0-10, A519-0-11, and A519-0-12.

Technical specifications and icons: 48 V, IP20, CRI>90, L80B10 >60,000 h, MacAdam Step 2, OPTIONS*, INCL, TRACK 48V, 360°, 90°, 20° - 33° / 53°.

Table with 6 columns: *OPTIONS, +RE, REF. ENDING, EXAMPLE, FINISHING, Lamp, Adaptor. It details options for DIM (No DIM, DIM DALI) and finishing (NT, NTW).

OTHER DIM OPTIONS
PLEASE CONSULT




COLOUR | NT | MATERIAL | AL | OPTICAL GLASS | PLEASE CONSULT »

OTHER CCT PLEASE CONSULT
*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).
CUSTOM GOBO PLEASE CONSULT



COCO SHAPER RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO SHAPER Recessed	A519-1- ☯ -00- NT	6W	2700K	20°-33°	500mA	650 lm	40-38%
	A519-1- ☯ -01- NT	6W	3000K	20°-33°	500mA	680 lm	40-38%
	A519-1- ☯ -02- NT	6W	4000K	20°-33°	500mA	730 lm	40-38%
	A519-1- ☯ -10- NT	6W	2700K	53°	500mA	650 lm	37%
	A519-1- ☯ -11- NT	6W	3000K	53°	500mA	680 lm	37%
	A519-1- ☯ -12- NT	6W	4000K	53°	500mA	730 lm	37%

220
240 V~ |  IP20 | CRI>90 | L80B10 >60.000 h

 MacAdam
Step 2

 OPTIONS*

 INCL

 Ø50

 360°


 90°

 20° - 33° / 53°

☯ *OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS
PLEASE CONSULT

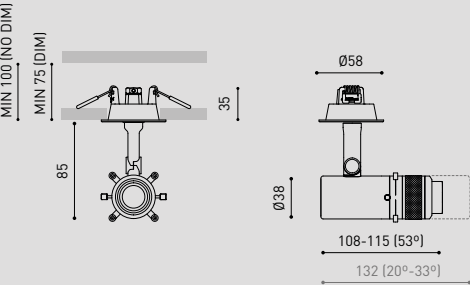

COLOUR | NT ■ | MATERIAL |  AL |  OPTICAL GLASS |

PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT
CUSTOM GOBO PLEASE CONSULT

BEAM & FINISHINGS



53° | NT




20°- 33° | NT



53° | NT



20°- 33° | NT



53° | NTW



20°- 33° | NTW

CO
CO

by ARKOSLIGHT