



CO  
CO

ARKOSLIGHT



# Compatto e performante

Nuova generazione LED. Fino **154 lm/W**  
di efficacia luminosa. Un cilindro compatto in alluminio  
con un **flusso lordo che arriva fino i 1340 lm.**






# Libertà di movimento


Rotazione a **360°** e inclinazione a **90°**.



COCO

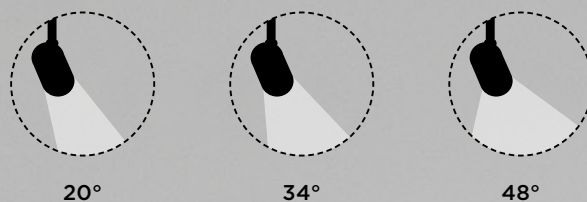

COCO 48V TUNABLE WHITE

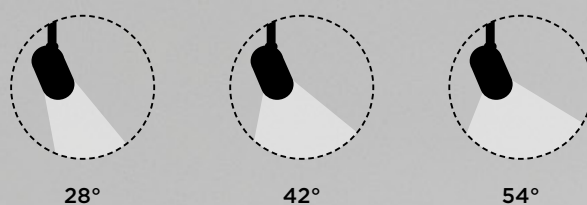

# Libertà di applicazioni

Tre fasci di luce **Spot** / **Medium** / **Flood** + versione **Super Spot 12°**.  
Copre molteplici esigenze: illuminazione d'accento, generale...





# Coco Super Spot

Altamente scenografico (**Beam 12°**). LED e lenti di alta qualità accuratamente selezionate. Mantiene un flusso uniforme e livelli confortevoli di luminanza.



# Opzione DIM on board

Integrazione perfetta per sistemi 48V.  
Consente di regolare da **0** a **100** l'intensità  
di ogni singolo apparecchio.





# Accessori


Dispone de diversi accessori:  
**anti-glare honeycomb** e **anti-glare screen**,  
che riducono l'abbagliamento e  
favoriscono il comfort visivo.



COCO ANTI-GLARE SCREEN



COCO ANTI-GLARE  
HONEYCOMB LOUVER

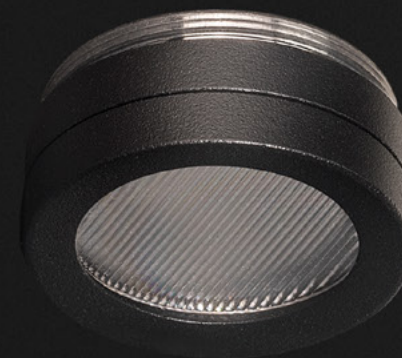



# Linear Filter



Trasforma il fascio di luce circolare in una **forma lineare**.  
Ideale per applicazioni dove è necessaria una distribuzione  
precisa e lineare della luce.





MAGNETIC 24V COCO



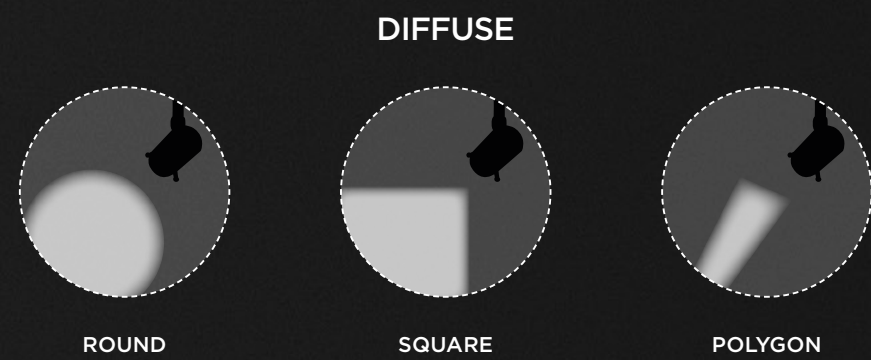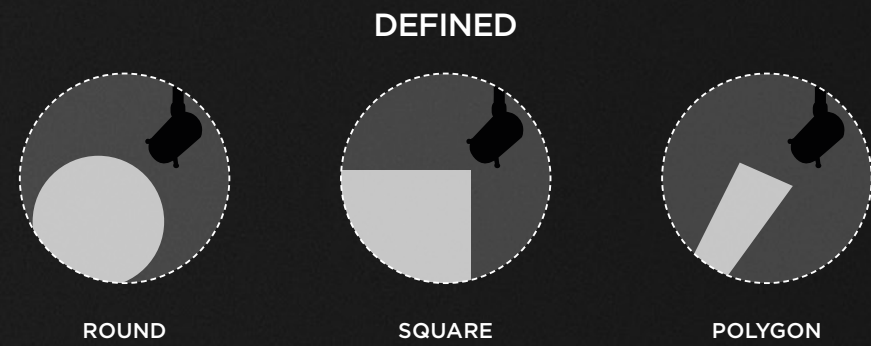

# Coco Shaper

Crea delle scenografie uniche proiettando il contorno geometrico desiderato: circonferenze, poligoni quadrilateri o triangolari.





8:20h · 3700K



12:00h · 5000K



17:00h · 2700K

# Tunable white

Versione disponibile per Coco 48V. Molto apprezzato in ambienti domestici, Hospitality, Uffici, ecc.




**COCO**  
SPECIFICHE  
TECNICHE








# MAGNETIC 24V COCO



## OPTIONAL ACCESSORIES

### COCO Anti-glare Honeycomb Louver\*\*

A498-90-00- | WT | NT |




### COCO Linear Filter\*\*

A498-90-02- | WT | NT |



### COCO Anti-glare Screen\*\*

A498-90-01- | WT | NT |



### COCO High Chromatic Led\*\* ⓘ » 281

NOT SOLD SEPARATELY

### TRIMLESS TOOL D16 X D34mm

A478-00-00

		P	CCT	Beam	I	Flux	LOR
MAGNETIC 24V COCO	A499-00-10-   WT   NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A499-00-11-   WT   NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A499-00-12-   WT   NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A499-00-20-   WT   NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A499-00-21-   WT   NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A499-00-22-   WT   NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A499-00-30-   WT   NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A499-00-31-   WT   NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A499-00-32-   WT   NT	8,7W	4000K	48°	500mA	1340 lm	86%

24 V | ⓘ IP20 | CRI>90 | L80B10 > 66.000h

MacAdam Step 2 EXCL\* INCL 360° 90° 20° / 34° / 48°



		P	CCT	Beam	I	Flux	LOR
MAGNETIC 24V COCO Super Spot	A499-00-00-   WT   NT	6W	2700K	12°	500mA	750 lm	66%
	A499-00-01-   WT   NT	6W	3000K	12°	500mA	800 lm	66%
	A499-00-02-   WT   NT	6W	4000K	12°	500mA	850 lm	66%

24 V | ⓘ IP20 | CRI>90 | L80B10 > 95.000h

MacAdam Step 2 EXCL\* INCL 360° 90° 12°


## MAGNETIC 24V CONNECTOR A435-01-00 | W | N |

\* MANDATORY FOR INSTALLATION ⓘ IP20 | ⓘ Ø16

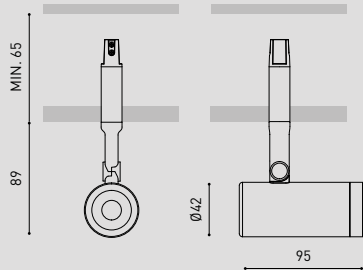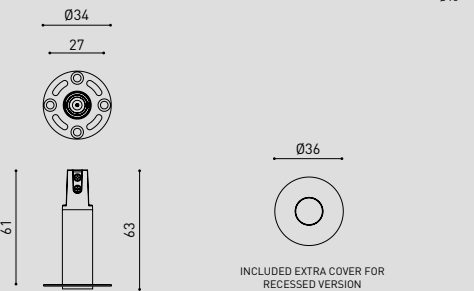


		P	V	D (A x B x C)
24V POWER SUPPLY	0434-01-37	60W	24V	180 x 52 x 30mm
	0433-10-22	100W	24V	295 x 43 x 30mm

220-240 V~ | MUST BE PLACED ON REMOTE



24V DIMMER	0433-01-32	DALI / Push	24V	181 x 42 x 20mm
	0433-01-33	CASAMBI	24V	172 x 42 x 20mm
	0434-01-64	WIFI	24V	105 x 44 x 23mm

24 V | MUST BE PLACED ON REMOTE OTHER DIM OPTIONS PLEASE CONSULT ⓘ DROP VOLTAGE » 287



COLOUR | WT □ | NT ■ | MATERIAL | AL | PC/PMMA | PLEASE CONSULT » ⓘ

OTHER CCT OPTIONS PLEASE CONSULT  
\*\* AFFECTS THE LIGHTING PARAMETERS



OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS  
NOT SOLD SEPARATELY

COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |



COCO Linear Filter

A498-90-02- | WT | NT |



SUITABLE FOR BEAM ≤ 34°

COCO Anti-glare Screen

A498-90-01- | WT | NT |



COCO High Chromatic Led ⓘ » 281

COCO RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO Recessed	A530-0- ⌘ -10-   WT   NT	8,7W	2700K	20°	500mA	1200 lm	87%
	A530-0- ⌘ -11-   WT   NT	8,7W	3000K	20°	500mA	1250 lm	87%
	A530-0- ⌘ -12-   WT   NT	8,7W	4000K	20°	500mA	1340 lm	87%
	A530-0- ⌘ -20-   WT   NT	8,7W	2700K	34°	500mA	1200 lm	89%
	A530-0- ⌘ -21-   WT   NT	8,7W	3000K	34°	500mA	1250 lm	89%
	A530-0- ⌘ -22-   WT   NT	8,7W	4000K	34°	500mA	1340 lm	89%
	A530-0- ⌘ -30-   WT   NT	8,7W	2700K	48°	500mA	1200 lm	86%
	A530-0- ⌘ -31-   WT   NT	8,7W	3000K	48°	500mA	1250 lm	86%
	A530-0- ⌘ -32-   WT   NT	8,7W	4000K	48°	500mA	1340 lm	86%

220  
240 V~

IP20

CRI>90

L80B10  
>66.000 h

MacAdam  
Step 2

OPTIONS\*

INCL

Ø50

350°

90°

20° / 34° / 48°

		P	CCT	Beam	I	Flux	LOR
COCO Recessed Super Spot	A530-0- ⌘ -00-   WT   NT	6W	2700K	12°	500mA	750 lm	66%
	A530-0- ⌘ -01-   WT   NT	6W	3000K	12°	500mA	800 lm	66%
	A530-0- ⌘ -02-   WT   NT	6W	4000K	12°	500mA	850 lm	66%

220  
240 V~

IP20

CRI>90

L80B10  
>55.000 h

MacAdam  
Step 2

OPTIONS\*

INCL

Ø50

350°

90°

12°

		P	CCT	Beam	I	Flux	LOR
COCO Recessed Tunable White	A530-12-18-   WT   NT	8,5W	2700-5000K	28°	500mA	1010 lm	85%
	A530-12-28-   WT   NT	8,5W	2700-5000K	42°	500mA	1010 lm	87%
	A530-12-38-   WT   NT	8,5W	2700-5000K	54°	500mA	1010 lm	84%

220  
240 V~

IP20

CRI>90

L80B10  
>55.000 h

MacAdam  
Step 3

DALI\*

INCL


Ø50

350°

90°

28° / 42° / 54°

⌘	*OPTIONS
2	DIM DALI
5	DIM PHASE CUT
7	DIM ON BOARD

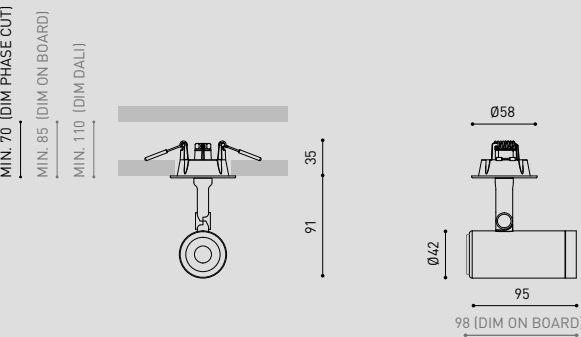

COLOUR | WT | NT | MATERIAL | AL | PC/PMMA | PLEASE CONSULT »

COLOURS MAY AFFECT THE LIGHTING PARAMETERS  
OTHER CCT & DIM OPTIONS PLEASE CONSULT





# COCO 48V

### OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS  
NOT SOLD SEPARATELY

#### COCO Anti-glare Honeycomb Louver

A498-90-00- | WT | NT |




#### COCO Anti-glare Screen

A498-90-01- | WT | NT |



#### COCO Linear Filter

A498-90-02- | WT | NT |



#### COCO High Chromatic Led

» 281

FINISHING	Lamp	Adaptor
WT	WT □	N ■
NT	NT ■	N ■
WTW	WT □	W □
NTW	NT ■	W □

COCO 48V	+RE	P	CCT	Beam	I	Flux	LOR
A498-0- Ⓢ -10-   WT   NT   WTW   NTW   -S		8,7W	2700K	20°	500mA	1200 lm	87%
A498-0- Ⓢ -11-   WT   NT   WTW   NTW   -S		8,7W	3000K	20°	500mA	1250 lm	87%
A498-0- Ⓢ -12-   WT   NT   WTW   NTW   -S		8,7W	4000K	20°	500mA	1340 lm	87%
A498-0- Ⓢ -20-   WT   NT   WTW   NTW   -S		8,7W	2700K	34°	500mA	1200 lm	89%
A498-0- Ⓢ -21-   WT   NT   WTW   NTW   -S		8,7W	3000K	34°	500mA	1250 lm	89%
A498-0- Ⓢ -22-   WT   NT   WTW   NTW   -S		8,7W	4000K	34°	500mA	1340 lm	89%
A498-0- Ⓢ -30-   WT   NT   WTW   NTW   -S		8,7W	2700K	48°	500mA	1200 lm	86%
A498-0- Ⓢ -31-   WT   NT   WTW   NTW   -S		8,7W	3000K	48°	500mA	1250 lm	86%
A498-0- Ⓢ -32-   WT   NT   WTW   NTW   -S		8,7W	4000K	48°	500mA	1340 lm	86%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >66.000 h

MacAdam Step 2

OPTIONS\*

INCL

TRACK 48V

360°

90°

20° / 34° / 48°

COCO 48V Super Spot	+RE	P	CCT	Beam	I	Flux	LOR
A498-0- Ⓢ -00-   WT   NT   WTW   NTW   -S		6W	2700K	12°	500mA	750 lm	66%
A498-0- Ⓢ -01-   WT   NT   WTW   NTW   -S		6W	3000K	12°	500mA	800 lm	66%
A498-0- Ⓢ -02-   WT   NT   WTW   NTW   -S		6W	4000K	12°	500mA	850 lm	66%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >95.000 h

MacAdam Step 2

OPTIONS\*

INCL

TRACK 48V

360°

90°

12°

COCO 48V Tunable White	+RE	P	CCT	Beam	I	Flux	LOR
A498-12-18-   WT   NT   WTW   NTW   -S		8,5W	2700-5000K	28°	500mA	1010 lm	85%
A498-12-28-   WT   NT   WTW   NTW   -S		8,5W	2700-5000K	42°	500mA	1010 lm	87%
A498-12-38-   WT   NT   WTW   NTW   -S		8,5W	2700-5000K	54°	500mA	1010 lm	84%

48 V | Ⓢ IP20 | CRI>90 | L80B10 >95.000 h

MacAdam Step 3

DALI\*

INCL

TRACK 48V

360°


90°

28° / 42° / 54°

Ⓢ	*OPTIONS
1	No DIM
2	DIM DALI
7	DIM ON BOARD

+RE	REF. ENDING	EXAMPLE
Ⓢ	Track 48V	A4980110WT
-S	Track 48V Short	A4980110WT-S

OTHER DIM OPTIONS PLEASE CONSULT

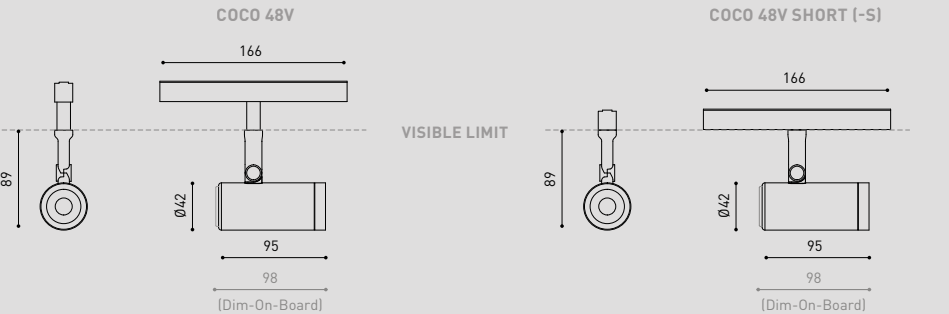

COLOUR | WT □ | NT ■ | MATERIAL | AL | PC/PMMA | PLEASE CONSULT »

OTHER CCT PLEASE CONSULT  
+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE  
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).



# OPTIONAL ACCESSORIES



COCO



COCO SUPER SPOT



COCO ANTI-GLARE HONEYCOMB LOUVER



COCO LINEAR FILTER



COCO ANTI-GLARE SCREEN



# FINISHINGS



NT



WT



NTW



WTW



NT



WT



NT SUPER SPOT



WT SUPER SPOT



NT



WT



NT SUPER SPOT



WT SUPER SPOT



COCO SHAPER
48V

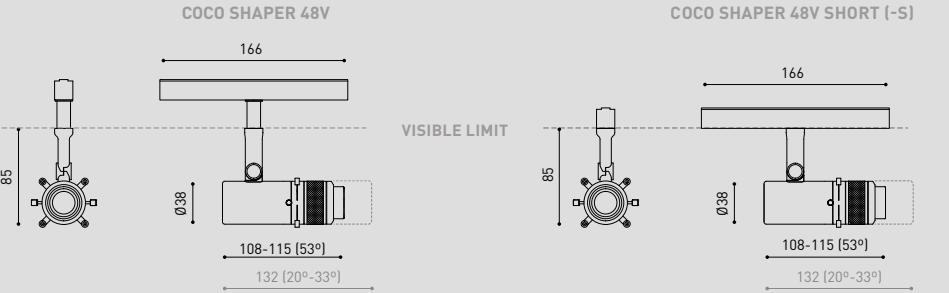


Table with 8 columns: COCO SHAPER 48V, +RE, P, CCT, Beam, I, Flux, LOR. It lists specifications for various models (A519-0-00 to A519-0-12) including power, color temperature, beam angle, and light output.

Technical specifications and icons: 48 V, IP20, CRI>90, L80B10 >60,000h, MacAdam Step 2, OPTIONS\*, INCL, TRACK 48V, 360°, 90°, 20° - 33° / 53°.

Table with 6 columns: \*OPTIONS, +RE, REF. ENDING, EXAMPLE, FINISHING, Lamp, Adaptor. It details configuration options for the lighting fixture.

OTHER DIM OPTIONS
PLEASE CONSULT



COLOUR | NT | MATERIAL | AL | OPTICAL GLASS | PLEASE CONSULT »


OTHER CCT PLEASE CONSULT
\*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).
CUSTOM GOBO PLEASE CONSULT





# COCO SHAPER RECESSED

		P	CCT	Beam	I	Flux	LOR
COCO SHAPER Recessed	A519-1- ☯ -00-   NT	6W	2700K	20°-33°	500mA	650 lm	40-38%
	A519-1- ☯ -01-   NT	6W	3000K	20°-33°	500mA	680 lm	40-38%
	A519-1- ☯ -02-   NT	6W	4000K	20°-33°	500mA	730 lm	40-38%
	A519-1- ☯ -10-   NT	6W	2700K	53°	500mA	650 lm	37%
	A519-1- ☯ -11-   NT	6W	3000K	53°	500mA	680 lm	37%
	A519-1- ☯ -12-   NT	6W	4000K	53°	500mA	730 lm	37%

220  
240 V~ |  IP20 | CRI>90 | L80B10  
>60.000 h




OPTIONS\*



☯ \*OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS  
PLEASE CONSULT

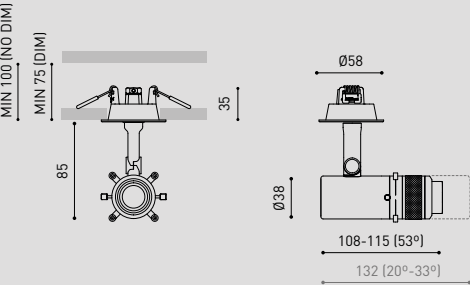

COLOUR | NT ■ | MATERIAL |  AL |  OPTICAL GLASS |

PLEASE CONSULT » 

OTHER CCT PLEASE CONSULT  
CUSTOM GOBO PLEASE CONSULT



# BEAM & FINISHINGS



53° | NT




20°- 33° | NT



53° | NT



20°- 33° | NT



53° | NTW



20°- 33° | NTW



CO  
CO

by ARKOSLIGHT