

TRACK 48V SYSTEM



ARKOSLIGHT®

TRACK 48V SYSTEM

TRIMLESS · SURFACE · SURFACE SHORT · SUSPENDED · SUSPENDED SHORT

ARKOSLIGHT®

TRACK 48V

TRACK 48V TRIMLESS

TRACK 48V SURFACE

TRACK 48V SURFACE SHORT

TRACK 48V SUSPENDED

TRACK 48V SUSPENDED SHORT





“Track 48V Surface” e “Track 48V Surface Short” due altezze di binario, due gamme di prodotto compatibile.

Ampia collezione di prodotti. Un sistema, numerose soluzioni luminose.

Miniaturizzazione e minimalismo formale: massima integrazione nell’architettura.

Sicurezza elettrica, bassa tensione.

Facile da installare, senza necessità di attrezzi.

Versatile: cambi di posizione semplici e manuali.

Massima qualità percepita nei dettagli e nelle finiture.

Compatibile con sistemi di controllo DALI.

MINORI DIMENSIONI, MAGGIORE INTEGRAZIONE

Le dimensioni del track 48V permettono di ottenere un'integrazione perfetta dell'illuminazione nello spazio architettonico. La versione 'trimless' appare come una sottile linea minimalista, mentre le varianti di superficie e a sospensione presentano un aspetto sobrio e discreto.

Le alternative 'short' sono state studiate per ottenere una notevole miniaturizzazione e offrire, una volta installate, un aspetto visivo di integrazione che riduce la presenza del binario ai minimi termini.





SICUREZZA ELETTRICA

La bassa tensione del binario è sinonimo di sicurezza elettrica per l'utente e offre una maggiore versatilità e facilità di utilizzo e installazione. Gli apparecchi di illuminazione possono essere installati senza necessità di staccare il binario dalla corrente e possono essere maneggiati direttamente con le mani, senza mezzi di protezione.

Questo vantaggio è dovuto alla bassa tensione del binario 48V che è inferiore al limite a partire da quale il contatto con l'elettricità è dannoso per l'essere umano. Le prestazioni della migliore illuminazione tecnica, con zero rischi.

FACILE DA INSTALLARE

Poche cose sono semplici come installare un apparecchio in un binario a bassa tensione di Arkoslight.

Senza necessità di attrezzi, solo con le mani e con una leggera pressione, il sistema di fissaggio del prodotto si attacca al binario e resta installato e alimentato elettricamente. Niente di più facile.

Inoltre, altrettanto facile come l'installazione è il cambio di posizione del prodotto. È sufficiente rimuoverlo dalla sua posizione con una leggera trazione e reinstallarlo, tutte le volte che si desidera.





PUREZZA ED ELEGANZA


L'ordine formale dei binari 48V, insieme all'elegante sobrietà e al minimalismo degli apparecchi di illuminazione per questo sistema, risulta in un insieme di squisita espressione: semplice, razionale e dall'alta qualità percepita.

Il curato dettaglio delle finiture si percepisce in ogni pezzo di questo sistema a bassa tensione, dove la miniaturizzazione obbliga a prestare particolare attenzione agli aspetti più minuscoli della costruzione di ogni binario e apparecchio di illuminazione.

CONTROLLO DALI

I binari 48V di Arkoslight sono compatibili con il sistema di controllo DALI, che permette la comunicazione bidirezionale tra il dispositivo di controllo e gli apparecchi di illuminazione e offre la possibilità all'utente di creare scene, governare il sistema da dispositivi di controllo DALI, ecc...

Attraverso i sistemi di controllo DALI e le sue varianti wireless ARK-Control, l'utente acquisisce il controllo totale del suo impianto, con tutte le prestazioni disponibili nelle alternative di alta tensione. Il sistema 48V non significa rinunciare a un controllo all'avanguardia per l'illuminazione architettonica.

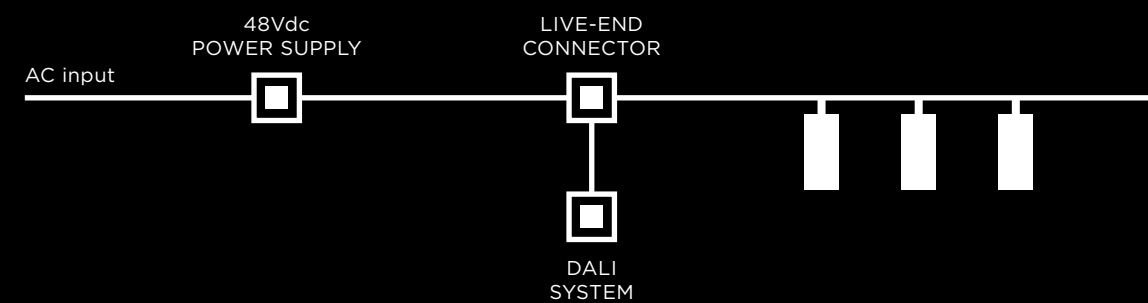

Casa Cruz | Design: Rubén Muedra Estudio de Arquitectura | Photography: Adrián Mora Maroto



VERSATILITÀ

Il binario a bassa tensione permette di soddisfare tutte le esigenze luminose di un progetto, al tempo che è in grado di adattarsi ai cambiamenti che possono verificarsi nella scena.

Non importa quale sia l'esigenza del progetto: accento, proiezione, ambiente... qualsiasi effetto luminoso è possibile con una delle soluzioni disponibili per questo sistema a bassa tensione di Arkoslight.

Le possibilità sceniche e configurative sono praticamente infinite.

TRACK 48V SURFACE



TRACK 48V SURFACE SHORT



UNA VARIANTE PER CIASCUNA ALTEZZA DI BINARIO

Il sistema Track 48V de Arkoslight è dotato di due altezze di binario, da 54mm e 29mm. Per progetti dove è prioritaria la minima espressione dell'illuminazione, esistono varianti di prodotto che sono state appositamente progettate per adattarsi al binario 'Short'.

Gympact (Belgium) | Design: Salvalor Store | Photography: Annelies Degroote






Kekono Restaurant (Spain) | Design: Pablo Muñoz Paya | Photography: Jesús Granada



Bang & Olufsen Shop, Valencia (Spain) | Design: Alfredo Menz  | Photography: H ctor Rubio - Images Positive

TRACK 48V SPECIFICHE TECNICHE

TRACK 48V




TRACK 48V TRIMLESS

TRACK 48V TRIMLESS 1m	A338-01-00-	WT	N
TRACK 48V TRIMLESS 2m	A338-02-00-	WT	N
TRACK 48V TRIMLESS 3m	A338-03-00-	WT	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	WT	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	WT	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)




TRACK 48V TRIMLESS
Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS
Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE


TRACK 48V SURFACE 1m	A338-11-00-	WT	NT
TRACK 48V SURFACE 2m	A338-12-00-	WT	NT
TRACK 48V SURFACE 3m	A338-13-00-	WT	NT
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	WT	NT



TRACK 48V SURFACE
Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT


TRACK 48V SURFACE SHORT 1m	A338-21-00-	WT	NT
TRACK 48V SURFACE SHORT 2m	A338-22-00-	WT	NT
TRACK 48V SURFACE SHORT 3m	A338-23-00-	WT	NT
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	WT	NT



TRACK 48V SURFACE SHORT
Corner 90° One Plane



*Electrical connection not included

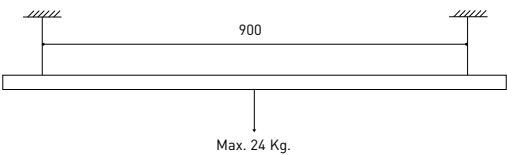


DROP VOLTAGE TABLE

		CABLE LENGHT (m)			
		5	10	20	30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGHT (m)			
		50	50	X	X
100	0,75	50	50	X	X
	1,5	50	50	40	25
150	0,75	40	15	X	X
	1,5	50	40	20	X

	P	V	D
CONSTANT VOLTAGE LED POWER SUPPLY	0434-01-61*	100W	48V
	0434-01-62	150W	48V

220 V ~
240


*To be installed inside the track.



ACCESSORIES


TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | W | N |



TRACK 48V Corner Connector


A338-00-12- | W | N |



TRACK 48V Corner 90° Connector One Plane


A338-00-24- | W | N |

*Not suitable for trimless version




TRACK 48V Central Connector

A338-00-02- | W | N |



TRACK 48V Wireless Control

0434-01-31- | W | N | Casambi/AAG Stucchi App



TRACK 48V Cover Gap 1m

0338-00-30- | W | N |

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05- | WT | N |



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities




TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21

* SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



TRACK 48V SURFACE Straight Joiner


A338-00-11

COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |

ACCESSORIES

TRACK 48V

SUSPENSION & SUSPENSION SHORT 48V



TRACK 48V Wired Power Supply Case

A338-00-25- | NT | WT |

A338-00-26- | NT | WT | 150 W NO DIM

220 V ~

240




INCL

150 W



DIM



TRACK 48V SURFACE Suspension Kit (2 units)

A338-00-15- | NT | WT |

TRACK 48V SURFACE Suspension Feed Kit

A338-00-16- | W | N |

NO DIM

A338-00-17- | W | N |

DIM

*For remote power supply

A338-00-27- | W | N |


NO DIM

A338-00-28- | W | N |

DIM

*For power supply inside the track

SURFACE & SURFACE SHORT 48V



TRACK 48V Power Supply Case

A338-00-29- | NT | WT |

150 W

220 V ~

240



INCL

*To be installed aside 48V Surface Tracks

WIRE TRIMLESS ACCESSORIES

FEED

MAINS TRIMLESS*


A023-00-01- | W | N |

NO DIM

Mains Thick Trimless*

A023-00-02- | W | N |


DIM

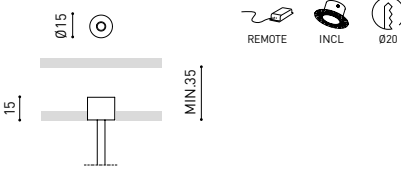

FASTENING

STEEL CABLE TRIMLESS*


A023-00-05- | W | N |

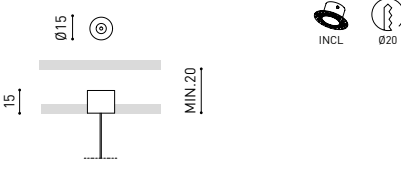

COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |

* AS MANY PIECES AS NEEDED ACCORDING TO YOUR PRODUCT

TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End

A338-00-06- | NT | WT |

TRACK 48V TRIMLESS & SURFACE End Feed

A338-00-07- | NT | WT |

SURFACE SHORT & SUSPENSION SHORT 48V




TRACK 48V SURFACE SHORT End

A338-00-18- | NT | WT |



TRACK 48V SURFACE SHORT End Feed

A338-00-19- | NT | WT |

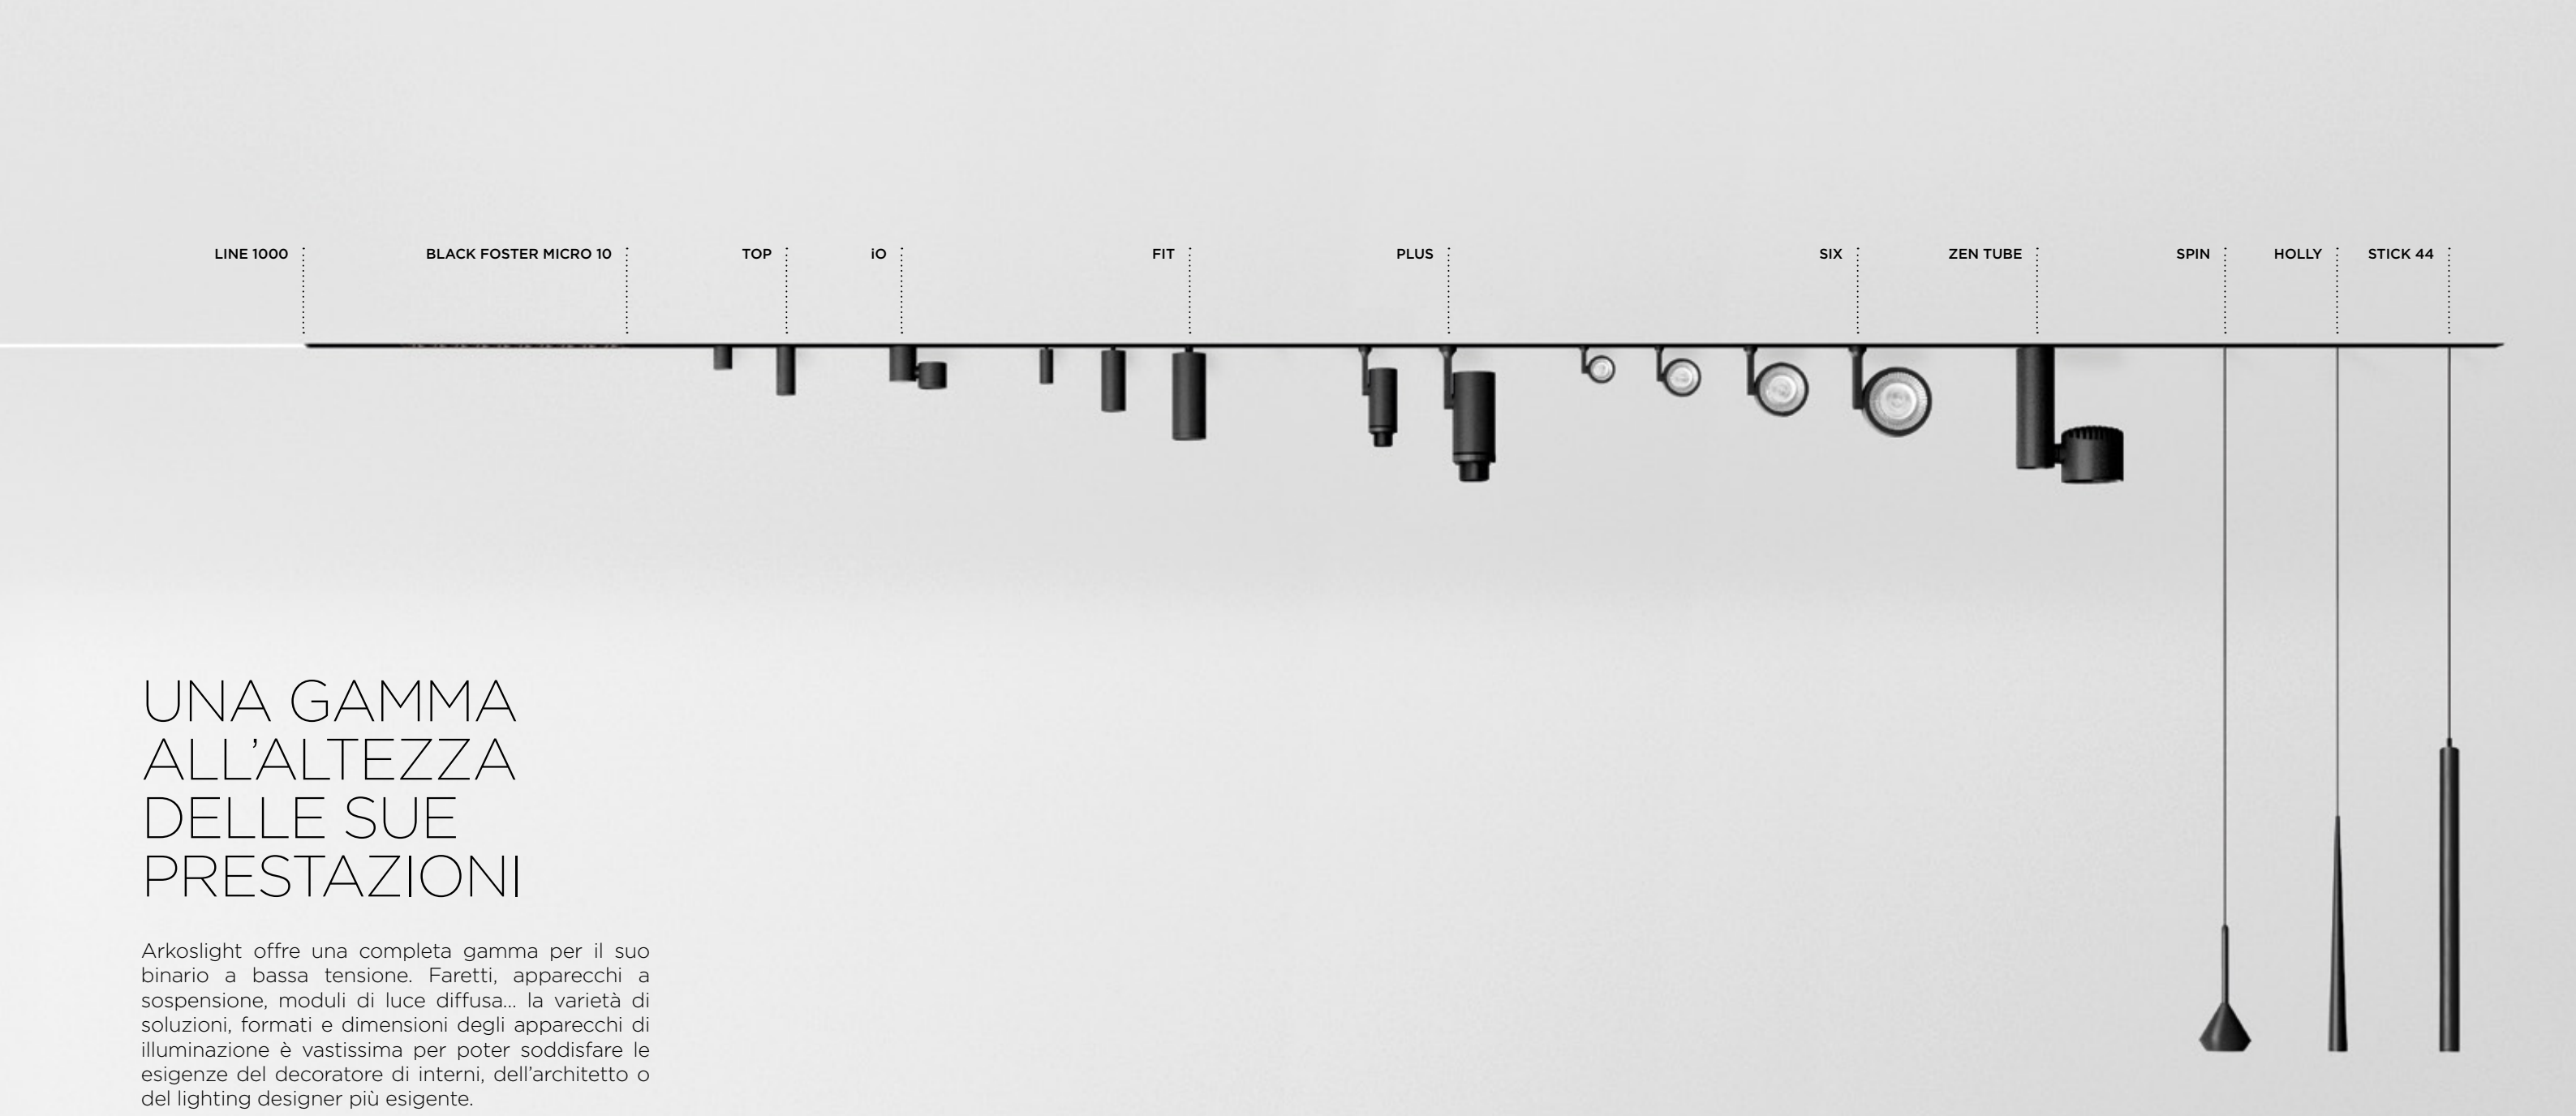

UNA GAMMA ALL'ALTEZZA DELLE SUE PRESTAZIONI

Arkoslight offre una completa gamma per il suo binario a bassa tensione. Faretti, apparecchi a sospensione, moduli di luce diffusa... la varietà di soluzioni, formati e dimensioni degli apparecchi di illuminazione è vastissima per poter soddisfare le esigenze del decoratore di interni, dell'architetto o del lighting designer più esigente.

LINE 48V	BLACK FOSTER MICRO 48V	TOP 48V	iO 48V	FIT 48V	PLUS 48V	SIX 48V	ZEN TUBE 48V	SPIN 48V	HOLLY 48V	STICK 48V
—	—	—		—	—	—				—
500 / 1000 / 2000	5 / 10	TOP MINI / TOP		20 / 35 / 50	PLUS MINI / PLUS	XS / S / M / L				22 / 44 / 66
10,5 / 21 / 42 W	7 / 14 W	6,5 W	4,5 W	2,1 - 12 W	6,5 / 18 W	4,5 - 24,5 W	12 / 17 / 23 W	6,5W	2,1W	5,6W
2700 / 3000 / 4000 K	2700 / 3000 / 4000 K	2700 / 3000 K	2700 / 3000 K	2700 / 3000 / 4000 K	2700 / 3000 / 4000 K	2700 / 3000 / 4000 K	2700 / 3000 K	2700 / 3000 K	2700 / 3000 K	2700 / 3000 K
1500 / 6600 Lm	775 / 1700 Lm	610 / 640 Lm	485 / 505 Lm	127 - 1230 Lm	630 - 2030 Lm	470 - 3000 Lm	1580 - 3190 Lm	600 / 630 Lm	190 / 210 Lm	530 / 600 Lm
98° BEAM	37° BEAM	20 / 30 / 56° BEAM	20 / 30 / 56° BEAM	12 - 54° BEAM	10 - 41° / 12 - 51° BEAM	17 - 38° BEAM	16 / 24 / 42° BEAM	24 / 40° BEAM	19 / 38° BEAM	22 / 37 / 46° BEAM
43% LOR	87% LOR	86 - 92 % LOR	86 - 92 % LOR	80 - 88 % LOR	20 - 40 % LOR	84 - 93 % LOR	90% LOR	84 / 86 % LOR	90 / 92 % LOR	81 - 84 % LOR



Private residence | Aurea arquitectos | Photography: Cuatiti Photo Studio

48V SYSTEM SIX 48V



SIX L 48V	+RE	P	CCT	Beam	I	Flux	LOR
A329-0- ∅ -10- WT NT WTW NTW -S		24,5W	2700K	17°	700mA	2850Lm	93%
A329-0- ∅ -11- WT NT WTW NTW -S		24,5W	3000K	17°	700mA	2950Lm	93%
A329-0- ∅ -12- WT NT WTW NTW -S		24,5W	4000K	17°	700mA	3000Lm	93%
A329-0- ∅ -30- WT NT WTW NTW -S		24,5W	2700K	26°	700mA	2850Lm	93%
A329-0- ∅ -31- WT NT WTW NTW -S		24,5W	3000K	26°	700mA	2950Lm	93%
A329-0- ∅ -32- WT NT WTW NTW -S		24,5W	4000K	26°	700mA	3000Lm	93%
A329-0- ∅ -20- WT NT WTW NTW -S		24,5W	2700K	34°	700mA	2850Lm	90%
A329-0- ∅ -21- WT NT WTW NTW -S		24,5W	3000K	34°	700mA	2950Lm	90%
A329-0- ∅ -22- WT NT WTW NTW -S		24,5W	4000K	34°	700mA	3000Lm	90%

48 V | IP20 | CRI>90 | L80B10 > 60.000h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

360°


310°

17° / 26° / 34°

∅	*OPTIONS	+RE	REF. ENDING	EXAMPLE
1	No DIM	∅	Track 48V	A3290110WT
2	DIM DALI	-S	Track 48V Short	A3290110WT-S

OPTIONAL ACCESSORY
SIX L High Chromatic LED** » 536
NOT SOLD SEPARATELY


FINISHING	Lamp	Adaptor
WT	WT N	
NT	NT N	
WTW	WT W	
NTW	NT W	

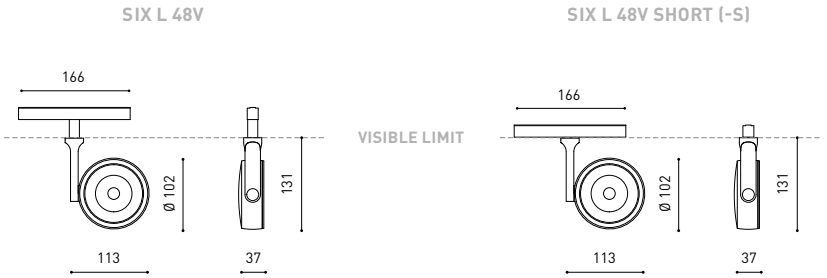

COLOUR | WT | NT | W | N | MATERIAL | AL | PC |

** ACCESSORY & COLOURS AFFECT THE LIGHTING PARAMETERS
+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT

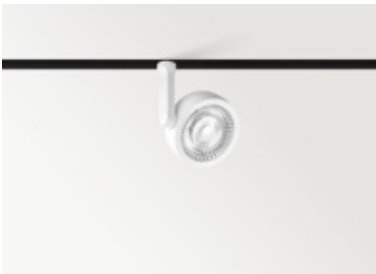

OPTIONAL ACCESSORIES

SIX M High Chromatic LED**		» 536
SIX S High Chromatic LED**		» 536

NOT SOLD SEPARATELY

FINISHING	Lamp	Adaptor
WT	WT	N
NT	NT	N
WTW	WT	W
NTW	NT	W



SIX M 48V	+RE	P	CCT	Beam	I	Flux	LOR
A330-0- -10- WT NT WTW NTW -S		17W	2700K	19°	500mA	2050Lm	93%
A330-0- -11- WT NT WTW NTW -S		17W	3000K	19°	500mA	2130Lm	93%
A330-0- -12- WT NT WTW NTW -S		17W	4000K	19°	500mA	2160Lm	93%
A330-0- -20- WT NT WTW NTW -S		17W	2700K	28°	500mA	2050Lm	91%
A330-0- -21- WT NT WTW NTW -S		17W	3000K	28°	500mA	2130Lm	91%
A330-0- -22- WT NT WTW NTW -S		17W	4000K	28°	500mA	2160Lm	91%
A330-0- -30- WT NT WTW NTW -S		17W	2700K	38°	500mA	2050Lm	93%
A330-0- -31- WT NT WTW NTW -S		17W	3000K	38°	500mA	2130Lm	93%
A330-0- -32- WT NT WTW NTW -S		17W	4000K	38°	500mA	2160Lm	93%

48 V | IP20 | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

360°

310°

19° / 28° / 38°

SIX S 48V	+RE	P	CCT	Beam	I	Flux	LOR
A333-0- -10- WT NT WTW NTW -S		8,5W	2700K	17°	500mA	1030Lm	86%
A333-0- -11- WT NT WTW NTW -S		8,5W	3000K	17°	500mA	1070Lm	86%
A333-0- -12- WT NT WTW NTW -S		8,5W	4000K	17°	500mA	1100Lm	86%
A333-0- -20- WT NT WTW NTW -S		8,5W	2700K	24°	500mA	1030Lm	84%
A333-0- -21- WT NT WTW NTW -S		8,5W	3000K	24°	500mA	1070Lm	84%
A333-0- -22- WT NT WTW NTW -S		8,5W	4000K	24°	500mA	1100Lm	84%
A333-0- -30- WT NT WTW NTW -S		8,5W	2700K	34°	500mA	1030Lm	89%
A333-0- -31- WT NT WTW NTW -S		8,5W	3000K	34°	500mA	1070Lm	89%
A333-0- -32- WT NT WTW NTW -S		8,5W	4000K	34°	500mA	1100Lm	89%

48 V | IP20 | CRI>90 | L80B10 > 60.000 h

MacAdam Step 3

OPTIONS*

INCL


TRACK 48V

360°

310°

17° / 24° / 34°

*OPTIONS	+RE	REF. ENDING	EXAMPLE
1 No DIM	Ø	Track 48V	A3300110WT
2 DIM DALI	-S	Track 48V Short	A3300110WT-S

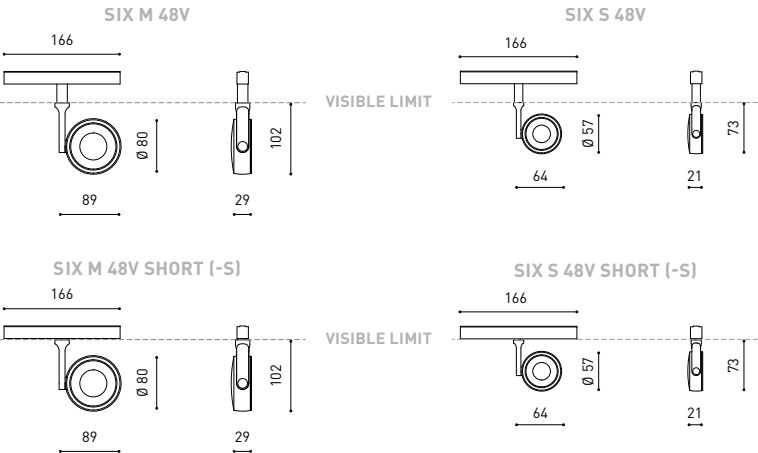

COLOUR | WT | NT | W | N | MATERIAL | AL | PC |

** ACCESSORY & COLOURS AFFECT THE LIGHTING PARAMETERS
+RE >> THE PRODUCTS FOR THE *TRACK 48V SHORT*, ADD “-S” AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT



OPTIONAL ACCESSORY

SIX XS High Chromatic LED**		» 536
-----------------------------	--	-------

NOT SOLD SEPARATELY

FINISHING	Lamp	Adaptor
WT	WT	N
NT	NT	N
WTW	WT	W
NTW	NT	W



SIX XS 48V	+RE	P	CCT	Beam	I	Flux	LOR
A335-0- -10- WT NT WTW NTW -S		4,5W	2700K	17°	500mA	470Lm	90%
A335-0- -11- WT NT WTW NTW -S		4,5W	3000K	17°	500mA	500Lm	90%
A335-0- -12- WT NT WTW NTW -S		4,5W	4000K	17°	500mA	530Lm	90%
A335-0- -20- WT NT WTW NTW -S		4,5W	2700K	23°	500mA	470Lm	86%
A335-0- -21- WT NT WTW NTW -S		4,5W	3000K	23°	500mA	500Lm	86%
A335-0- -22- WT NT WTW NTW -S		4,5W	4000K	23°	500mA	530Lm	86%
A335-0- -30- WT NT WTW NTW -S		4,5W	2700K	34°	500mA	470Lm	88%
A335-0- -31- WT NT WTW NTW -S		4,5W	3000K	34°	500mA	500Lm	88%
A335-0- -32- WT NT WTW NTW -S		4,5W	4000K	34°	500mA	530Lm	88%

48 V | IP20 | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

360°

310°

17° / 23° / 34°

SIX XS 48V Double	+RE	P	CCT	Beam	I	Flux	LOR
A335-1- -10- WT NT WTW NTW -S		9W	2700K	17°	500mA	2 X 470Lm	90%
A335-1- -11- WT NT WTW NTW -S		9W	3000K	17°	500mA	2 X 500Lm	90%
A335-1- -12- WT NT WTW NTW -S		9W	4000K	17°	500mA	2 X 530Lm	90%
A335-1- -20- WT NT WTW NTW -S		9W	2700K	23°	500mA	2 X 470Lm	86%
A335-1- -21- WT NT WTW NTW -S		9W	3000K	23°	500mA	2 X 500Lm	86%
A335-1- -22- WT NT WTW NTW -S		9W	4000K	23°	500mA	2 X 530Lm	86%
A335-1- -30- WT NT WTW NTW -S		9W	2700K	34°	500mA	2 X 470Lm	88%
A335-1- -31- WT NT WTW NTW -S		9W	3000K	34°	500mA	2 X 500Lm	88%
A335-1- -32- WT NT WTW NTW -S		9W	4000K	34°	500mA	2 X 530Lm	88%

48 V | IP20 | CRI>90 | L80B10 > 60.000 h

MacAdam Step 2

OPTIONS*

INCL


TRACK 48V

360°

310°

17° / 23° / 34°

*OPTIONS	+RE	REF. ENDING	EXAMPLE
1 No DIM	Ø	Track 48V	A3350110WT
2 DIM DALI	-S	Track 48V Short	A3350110WT-S

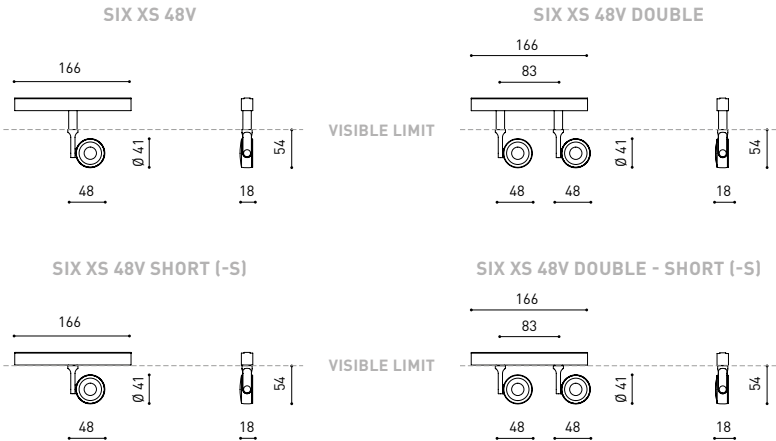

COLOUR | WT | NT | W | N | MATERIAL | AL | PC |

** ACCESSORY & COLOURS AFFECT THE LIGHTING PARAMETERS
+RE >> THE PRODUCTS FOR THE *TRACK 48V SHORT*, ADD “-S” AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT

48V SYSTEM
FIT 48V



FIT 50 48V	+RE	P	CCT	Beam	I	Flux	LOR
A346-0- ∅ -10- WT NT G WTW NTW GW -S	12W	2700K	15°	1050mA	1040Lm	85%	
A346-0- ∅ -11- WT NT G WTW NTW GW -S	12W	3000K	15°	1050mA	1120Lm	85%	
A346-0- ∅ -12- WT NT G WTW NTW GW -S	12W	4000K	15°	1050mA	1230Lm	85%	
A346-0- ∅ -20- WT NT G WTW NTW GW -S	12W	2700K	28°	1050mA	1040Lm	82%	
A346-0- ∅ -21- WT NT G WTW NTW GW -S	12W	3000K	28°	1050mA	1120Lm	82%	
A346-0- ∅ -22- WT NT G WTW NTW GW -S	12W	4000K	28°	1050mA	1230Lm	82%	
A346-0- ∅ -30- WT NT G WTW NTW GW -S	12W	2700K	47°	1050mA	1040Lm	80%	
A346-0- ∅ -31- WT NT G WTW NTW GW -S	12W	3000K	47°	1050mA	1120Lm	80%	
A346-0- ∅ -32- WT NT G WTW NTW GW -S	12W	4000K	47°	1050mA	1230Lm	80%	

48 V

IP20

CRI > 90

L80B10 > 60,000h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

360°

90°

15°/28°/47°

∞	*OPTIONS
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
∅	Track 48V	A3460110WT
-S	Track 48V Short	A3460110WT-S


FINISHING	Lamp	Adaptor
WT	WT	N
NT	NT	N
G	G	N
WTW	WT	W
NTW	NT	W
GW	G	W

OPTIONAL ACCESSORY

FIT 50 Anti-glare Honeycomb Louver **

A346-00-00

NOT SOLD SEPARATELY

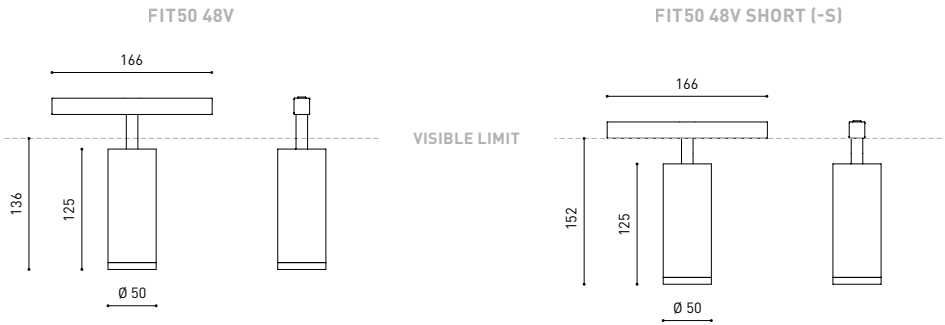

COLOUR

WT | NT | G | W | N

MATERIAL

AL | PC


** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT



Azora Offices | Francesc Rifé Studio | Photography: David Zarzoso

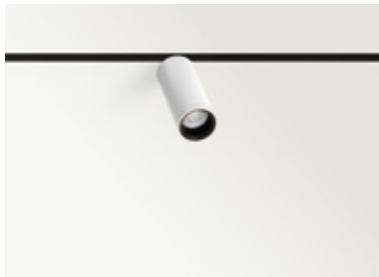

FIT 35 48V	+RE	P	CCT	Beam	I	Flux	LOR
A345-0- ∞ -10- WT NT G WTW NTW GW -S		5,5W	2700K	19°	500mA	590Lm	82%
A345-0- ∞ -11- WT NT G WTW NTW GW -S		5,5W	3000K	19°	500mA	630Lm	82%
A345-0- ∞ -12- WT NT G WTW NTW GW -S		5,5W	4000K	19°	500mA	700Lm	82%
A345-0- ∞ -20- WT NT G WTW NTW GW -S		5,5W	2700K	29°	500mA	590Lm	80%
A345-0- ∞ -21- WT NT G WTW NTW GW -S		5,5W	3000K	29°	500mA	630Lm	80%
A345-0- ∞ -22- WT NT G WTW NTW GW -S		5,5W	4000K	29°	500mA	700Lm	80%
A345-0- ∞ -30- WT NT G WTW NTW GW -S		5,5W	2700K	38°	500mA	590Lm	80%
A345-0- ∞ -31- WT NT G WTW NTW GW -S		5,5W	3000K	38°	500mA	630Lm	80%
A345-0- ∞ -32- WT NT G WTW NTW GW -S		5,5W	4000K	38°	500mA	700Lm	80%

48V

III

IP20

CRI>90

L80B10
> 60.000h

MacAdam
Step 2

OPTIONS*

INCL

TRACK 48V

360°

90°

19°/29°/38°

∞	*OPTIONS
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
∅	Track 48V	A3450110WT
-S	Track 48V Short	A3450110WT-S


FINISHING	Lamp	Adaptor
WT	WT □ N ■	
NT	NT ■ N ■	
G	G ■ N ■	
WTW	WT □ W □	
NTW	NT ■ W □	
GW	G ■ W □	

OPTIONAL ACCESSORY

FIT 35 Anti-glare Honeycomb Louver **

A345-00-00

NOT SOLD SEPARATELY

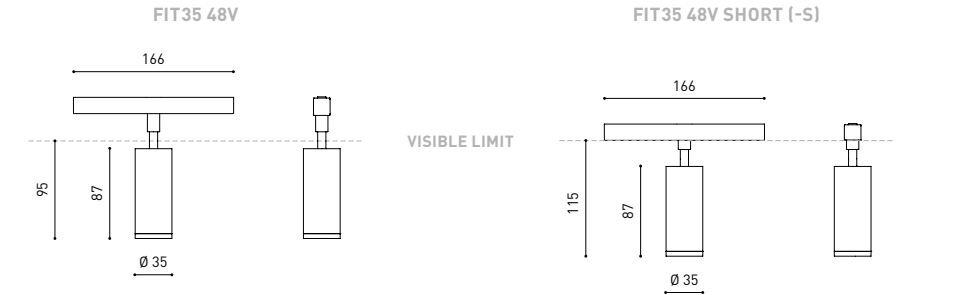

COLOUR | WT □ | NT ■ | G ■ | W □ | N ■ |

MATERIAL | AL | PC |

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT



FIT 35 48V Double	+RE	P	CCT	Beam	I	Flux	LOR
A345-1- ∞ -10- WT NT G WTW NTW GW -S		11W	2700K	19°	500mA	2 x 590Lm	82%
A345-1- ∞ -11- WT NT G WTW NTW GW -S		11W	3000K	19°	500mA	2 x 630Lm	82%
A345-1- ∞ -12- WT NT G WTW NTW GW -S		11W	4000K	19°	500mA	2 x 700Lm	82%
A345-1- ∞ -20- WT NT G WTW NTW GW -S		11W	2700K	29°	500mA	2 x 590Lm	80%
A345-1- ∞ -21- WT NT G WTW NTW GW -S		11W	3000K	29°	500mA	2 x 630Lm	80%
A345-1- ∞ -22- WT NT G WTW NTW GW -S		11W	4000K	29°	500mA	2 x 700Lm	80%
A345-1- ∞ -30- WT NT G WTW NTW GW -S		11W	2700K	38°	500mA	2 x 590Lm	80%
A345-1- ∞ -31- WT NT G WTW NTW GW -S		11W	3000K	38°	500mA	2 x 630Lm	80%
A345-1- ∞ -32- WT NT G WTW NTW GW -S		11W	4000K	38°	500mA	2 x 700Lm	80%

48V

III

IP20

CRI>90

L80B10
> 60.000h

MacAdam
Step 2

OPTIONS*

INCL

TRACK 48V

360°

90°

19°/29°/38°

∞	*OPTIONS
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
∅	Track 48V	A3451110WT
-S	Track 48V Short	A3451110WT-S


FINISHING	Lamp	Adaptor
WT	WT □ N ■	
NT	NT ■ N ■	
G	G ■ N ■	
WTW	WT □ W □	
NTW	NT ■ W □	
GW	G ■ W □	

OPTIONAL ACCESSORY

FIT 35 Anti-glare Honeycomb Louver **

A345-00-00

NOT SOLD SEPARATELY

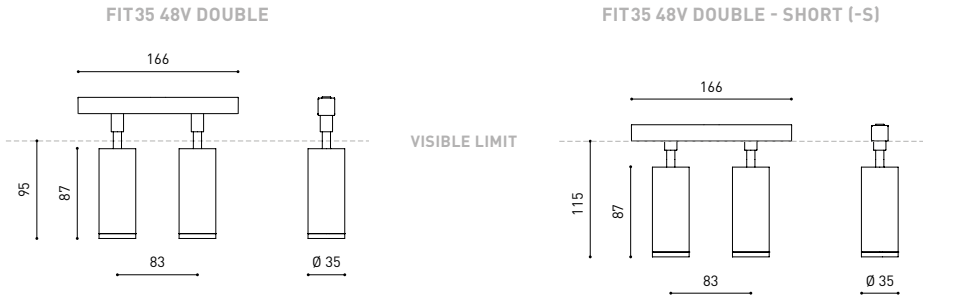

COLOUR | WT □ | NT ■ | G ■ | W □ | N ■ |

MATERIAL | AL | PC |


** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT



Buthaup Sant Cugat, Barcelona (Spain) | Francesc Rifé Studio | Photography: Montse Capdevila

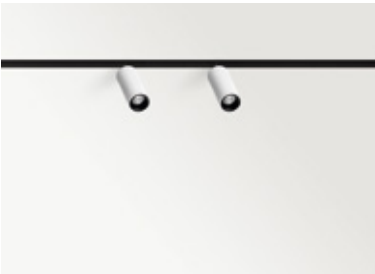

FINISHING	Lamp	Adaptor
WT	WT <input type="checkbox"/>	N <input checked="" type="checkbox"/>
NT	NT <input checked="" type="checkbox"/>	N <input checked="" type="checkbox"/>
G	G <input checked="" type="checkbox"/>	N <input checked="" type="checkbox"/>
WTW	WT <input type="checkbox"/>	W <input type="checkbox"/>
NTW	NT <input checked="" type="checkbox"/>	W <input type="checkbox"/>
GW	G <input checked="" type="checkbox"/>	W <input type="checkbox"/>

FIT20 48V	+RE	P	CCT	Beam	I	Flux	LOR
A344-0- ∞ -10- WT NT G WTW NTW GW -S		2,1W	2700K	12°	700mA	127Lm	87%
A344-0- ∞ -11- WT NT G WTW NTW GW -S		2,1W	3000K	12°	700mA	150Lm	87%
A344-0- ∞ -20- WT NT G WTW NTW GW -S		2,1W	2700K	30°	700mA	127Lm	88%
A344-0- ∞ -21- WT NT G WTW NTW GW -S		2,1W	3000K	30°	700mA	150Lm	88%
A344-0- ∞ -30- WT NT G WTW NTW GW -S		2,1W	2700K	54°	700mA	127Lm	81%
A344-0- ∞ -31- WT NT G WTW NTW GW -S		2,1W	3000K	54°	700mA	150Lm	81%

48 V | IP20 | CRI>90 | L80B10 > 50.000h

MacAdam Step 3

OPTIONS*

INCL

TRACK 48V

360°

90°

12°/30°/54°

FIT20 48V Double	+RE	P	CCT	Beam	I	Flux	LOR
A344-1- ∞ -10- WT NT G WTW NTW GW -S		4,2W	2700K	12°	700mA	2 x 127Lm	87%
A344-1- ∞ -11- WT NT G WTW NTW GW -S		4,2W	3000K	12°	700mA	2 x 150Lm	87%
A344-1- ∞ -20- WT NT G WTW NTW GW -S		4,2W	2700K	30°	700mA	2 x 127Lm	88%
A344-1- ∞ -21- WT NT G WTW NTW GW -S		4,2W	3000K	30°	700mA	2 x 150Lm	88%
A344-1- ∞ -30- WT NT G WTW NTW GW -S		4,2W	2700K	54°	700mA	2 x 127Lm	81%
A344-1- ∞ -31- WT NT G WTW NTW GW -S		4,2W	3000K	54°	700mA	2 x 150Lm	81%

48 V | IP20 | CRI>90 | L80B10 > 50.000h

MacAdam Step 3

OPTIONS*

INCL

TRACK 48V


360°

90°

12°/30°/54°

∞	*OPTIONS
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
0	Track 48V	A3440110WT
-S	Track 48V Short	A3440110WT-S

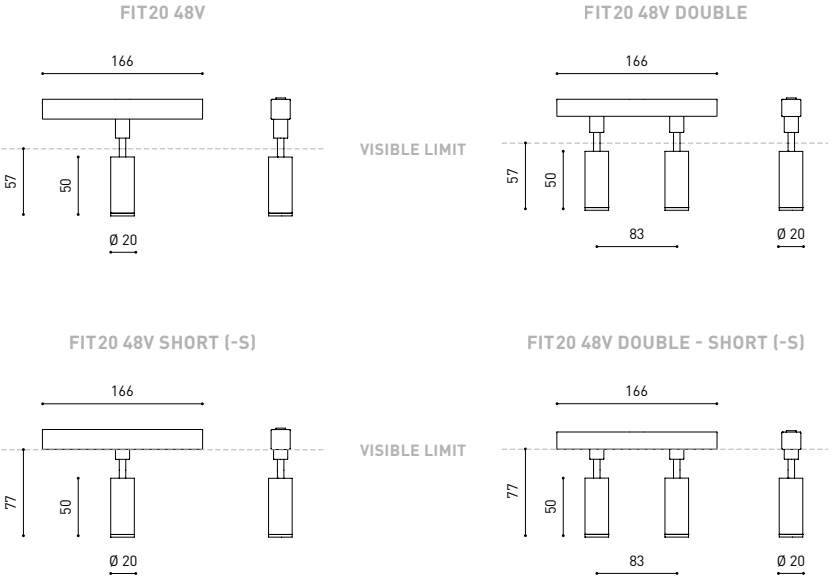

COLOUR | WT ☐ | NT ☒ | G ☒ | W ☐ | N ☐ | MATERIAL | AL | PC |

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT



Photography: Jesús Granada

48V SYSTEM
PLUS 48V



OPTIONAL ACCESSORIES		
plus High Chromatic LED**		» 536
plus MINI High Chromatic LED**		» 536
NOT SOLD SEPARATELY		

FINISHING	Lamp	Adaptor
WT	WT	N
NT	NT	N
WTW	WT	W
NTW	NT	W

PLUS 48V	+RE	P	CCT	Beam	I	Flux	LOR
A323-00- -0- WT NT WTW NTW -S		18W	2700K	12°-51°	500mA	1920Lm	26-40%
A323-00- -1- WT NT WTW NTW -S		18W	3000K	12°-51°	500mA	2000Lm	26-40%
A323-00- -2- WT NT WTW NTW -S		18W	4000K	12°-51°	500mA	2030Lm	26-40%

48 V

IP20

CRI>90

L80B10
> 60.000 h

MacAdam
Step 2

OPTIONS*

INCL

TRACK 48V

360°

180°

12°-51°

PLUS Mini 48V	+RE	P	CCT	Beam	I	Flux	LOR
A326-00- -0- WT NT WTW NTW -S		6,5W	2700K	10°-41°	700mA	630Lm	20-40%
A326-00- -1- WT NT WTW NTW -S		6,5W	3000K	10°-41°	700mA	660Lm	20-40%
A326-00- -2- WT NT WTW NTW -S		6,5W	4000K	10°-41°	700mA	680Lm	20-40%

48 V

IP20

CRI>90

L80B10
> 60.000 h

MacAdam
Step 2

OPTIONS*

INCL


TRACK 48V

360°

180°

10°-41°

+RE	REF. ENDING	EXAMPLE
	Track 48V	A3230010WT
-S	Track 48V Short	A3230010WT-S

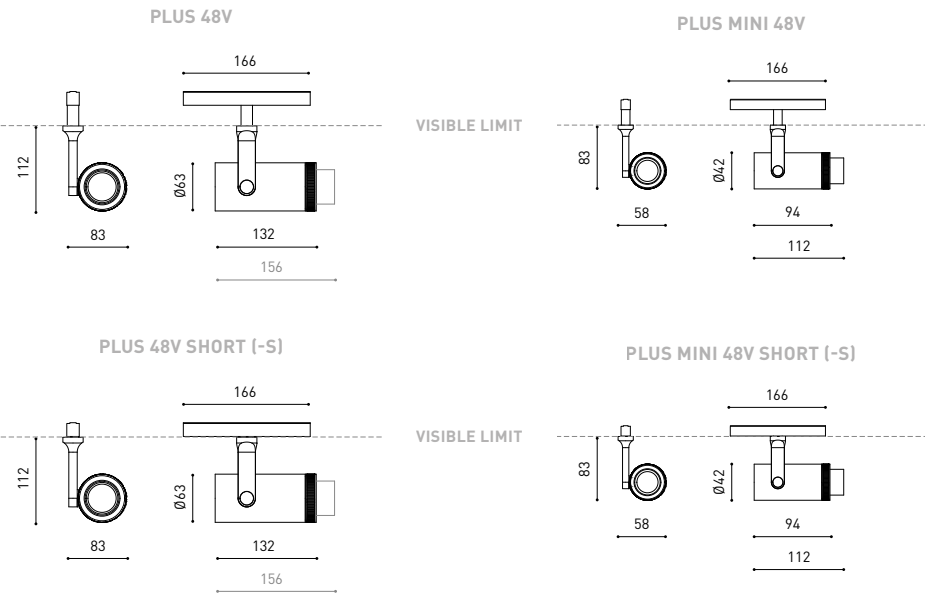


COLOUR | WT | NT | W | N | MATERIAL | AL | OPTICAL GLASS || OPTICAL PMMA |

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT

48V SYSTEM
iO 48V

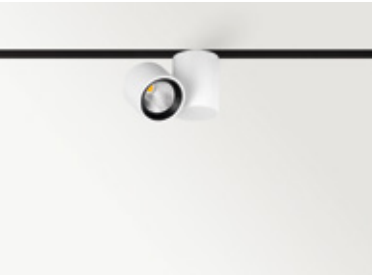

FINISHING	Lamp	Adaptor
WT	WT <input type="checkbox"/>	N <input checked="" type="checkbox"/>
NT	NT <input checked="" type="checkbox"/>	N <input checked="" type="checkbox"/>
WTW	WT <input type="checkbox"/>	W <input type="checkbox"/>
NTW	NT <input checked="" type="checkbox"/>	W <input type="checkbox"/>

iO 48V	+RE	P	CCT	Beam	I	Flux	LOR
A348-0- -10- WT NT WTW NTW -S		4,5W	2700K	20°	500mA	485Lm	92%
A348-0- -11- WT NT WTW NTW -S		4,5W	3000K	20°	500mA	505Lm	92%
A348-0- -20- WT NT WTW NTW -S		4,5W	2700K	30°	500mA	485Lm	89%
A348-0- -21- WT NT WTW NTW -S		4,5W	3000K	30°	500mA	505Lm	89%
A348-0- -30- WT NT WTW NTW -S		4,5W	2700K	56°	500mA	485Lm	86%
A348-0- -31- WT NT WTW NTW -S		4,5W	3000K	56°	500mA	505Lm	86%

48 V

IP20

CRI>90

L80B10
>60.000h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V

355°

325°

20° / 30° / 56°


	*OPTIONS	+RE	REF. ENDING	EXAMPLE
1	No DIM		Track 48V	A3480110WT
2	DIM DALI	-S	Track 48V Short	A3480110WT-S

OPTIONAL ACCESSORIES

NOT SOLD SEPARATELY

iO Beam Mixer Diffuser**	0805-01-00	iO Anti-glare Honeycomb Louver**	0806-00-00 WT NT

iO High Chromatic LED**	» 536
-------------------------	-------

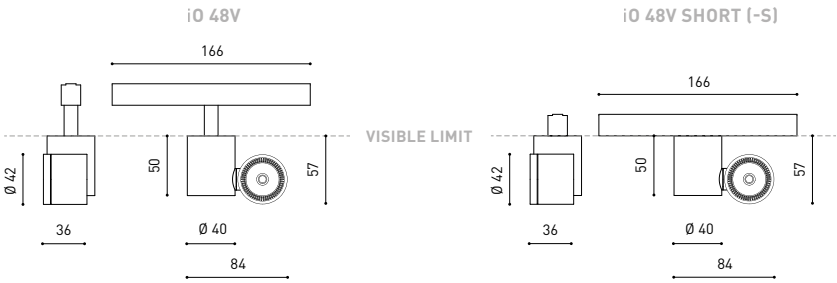

COLOUR | WT ☐ | NT ☒ | W ☐ | N ☒ | MATERIAL | AL | PC |

** AFFECTS THE LIGHTING PARAMETERS
*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).


» PLEASE CONSULT

Casa Cruz, Valencia (Spain) | Rubén Muedra - Estudio de Arquitectura | Photography: Adrián Mora Maroto



48V SYSTEM

ZEN TUBE 48V

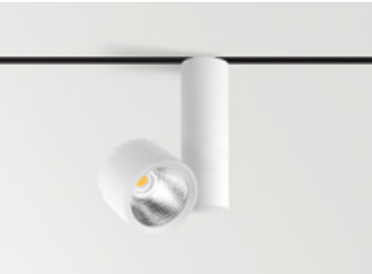

		+RE	P	CCT	I	Flux	LOR
ZEN TUBE 48V 1	A341-11- ☉ -0-	WT	NT	WTW	NTW	-S	12W 2700K 350mA 1580Lm 90%
	A341-11- ☉ -1-	WT	NT	WTW	NTW	-S	12W 3000K 350mA 1640Lm 90%
ZEN TUBE 48V 2	A341-12- ☉ -0-	WT	NT	WTW	NTW	-S	17W 2700K 500mA 2130Lm 90%
	A341-12- ☉ -1-	WT	NT	WTW	NTW	-S	17W 3000K 500mA 2220Lm 90%
ZEN TUBE 48V 3	A341-13- ☉ -0-	WT	NT	WTW	NTW	-S	23W 2700K 700mA 3070Lm 90%
	A341-13- ☉ -1-	WT	NT	WTW	NTW	-S	23W 3000K 700mA 3190Lm 90%
DALI	A341-23- ☉ -0-	WT	NT	WTW	NTW	-S	23W 2700K 700mA 3070Lm 90%
	A341-23- ☉ -1-	WT	NT	WTW	NTW	-S	23W 3000K 700mA 3190Lm 90%

48 V

IP20

CRI>90

L80B10
>60.000h

MacAdam
Step 2

INCL

TRACK 48V

355°


270°

16° / 24° / 42°

☉	BEAM OPTIONS
1	16°
2	24°
3	42°

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	A3411110WT
-S	Track 48V Short	A3411110WT-S

FINISHING	Lamp	Adaptor
WT	WT ☐	N ■
NT	NT ■	N ■
WTW	WT ☐	W ☐
NTW	NT ■	W ☐

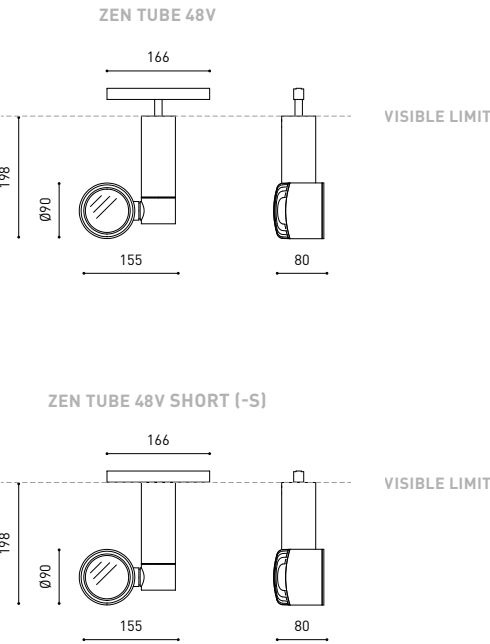

OPTIONAL ACCESSORIES	
NOT SOLD SEPARATELY	
ZEN Anti-glare Honeycomb Louver *	0702-02-00
ZEN Elliptical Refractor *	0700-08-00
ZEN Beam Mixer Diffuser*	0805-02-00
ZEN High Chromatic LED*	

COLOUR | WT ☐ | NT ■ | W ☐ | N ■ | MATERIAL | AL | GL-TRANS |

* AFFECTS THE LIGHTING PARAMETERS

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT

48V SYSTEM

TOP 48V



TOP 48V	+RE	P	CCT	Beam	I	Flux	LOR
A339-0- Ⓞ -10- WT NT WTW NTW -S		6,5W	2700K	20°	700mA	610Lm	92%
A339-0- Ⓞ -11- WT NT WTW NTW -S		6,5W	3000K	20°	700mA	640Lm	92%
A339-0- Ⓞ -20- WT NT WTW NTW -S		6,5W	2700K	30°	700mA	610Lm	89%
A339-0- Ⓞ -21- WT NT WTW NTW -S		6,5W	3000K	30°	700mA	640Lm	89%
A339-0- Ⓞ -30- WT NT WTW NTW -S		6,5W	2700K	56°	700mA	610Lm	86%
A339-0- Ⓞ -31- WT NT WTW NTW -S		6,5W	3000K	56°	700mA	640Lm	86%

48 V

 IP20

CRI>90

L80B10
>60.000h

 MacAdam
Step 2

 OPTIONS*

 INCL

 TRACK 48V

 UGR <19

 20° / 30° / 56°

FINISHING	Lamp	Adaptor
WT	WT <input type="checkbox"/> N <input checked="" type="checkbox"/>	
NT	NT <input checked="" type="checkbox"/> N <input checked="" type="checkbox"/>	
WTW	WT <input type="checkbox"/> W <input type="checkbox"/>	
NTW	NT <input checked="" type="checkbox"/> W <input type="checkbox"/>	

Ⓞ	*OPTIONS
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	A3390110WT
-S	Track 48V Short	A3390110WT-S



TOP Mini 48V	+RE	P	CCT	Beam	I	Flux	LOR
A340-0- Ⓞ -10- WT NT WTW NTW -S		6,5W	2700K	20°	700mA	610Lm	92%
A340-0- Ⓞ -11- WT NT WTW NTW -S		6,5W	3000K	20°	700mA	640Lm	92%
A340-0- Ⓞ -20- WT NT WTW NTW -S		6,5W	2700K	30°	700mA	610Lm	89%
A340-0- Ⓞ -21- WT NT WTW NTW -S		6,5W	3000K	30°	700mA	640Lm	89%
A340-0- Ⓞ -30- WT NT WTW NTW -S		6,5W	2700K	56°	700mA	610Lm	86%
A340-0- Ⓞ -31- WT NT WTW NTW -S		6,5W	3000K	56°	700mA	640Lm	86%

48 V

 IP20

CRI>90

L80B10
>60.000h

 MacAdam
Step 2

 OPTIONS*

 INCL

 TRACK 48V



 UGR <19

 20° / 30° / 56°

FINISHING	Lamp	Adaptor
WT	WT <input type="checkbox"/> N <input checked="" type="checkbox"/>	
NT	NT <input checked="" type="checkbox"/> N <input checked="" type="checkbox"/>	
WTW	WT <input type="checkbox"/> W <input type="checkbox"/>	
NTW	NT <input checked="" type="checkbox"/> W <input type="checkbox"/>	

Ⓞ	*OPTIONS
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	A3400110WT
-S	Track 48V Short	A3400110WT-S

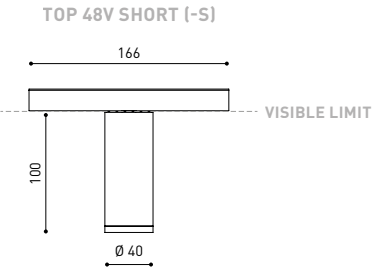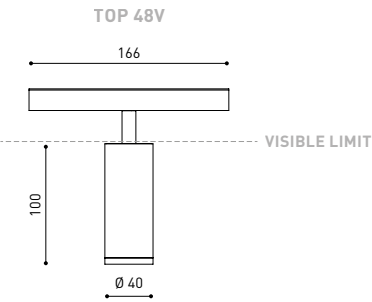

OPTIONAL ACCESSORIES

NOT SOLD SEPARATELY



TOP Beam Mixer Diffuser**	0805-01-00
---------------------------	------------



top Anti-glare Honeycomb Louver**	0807-00-00 WT NT
-----------------------------------	----------------------



TOP High Chromatic LED**	 » 536
--------------------------	---

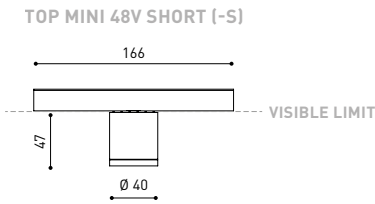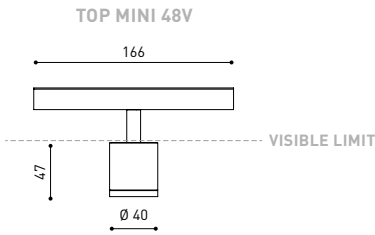

OPTIONAL ACCESSORIES

NOT SOLD SEPARATELY

TOP Beam Mixer Diffuser**	0805-01-00
---------------------------	------------



top Anti-glare Honeycomb Louver**	0807-00-00 WT NT
-----------------------------------	----------------------



TOP High Chromatic LED**	 » 536
--------------------------	---

COLOUR | WT ☐ | NT ☒ | W ☐ | N ☒ | MATERIAL |  AL |  PC |

** AFFECTS THE LIGHTING PARAMETERS
+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

 » PLEASE CONSULT

COLOUR | WT ☐ | NT ☒ | W ☐ | N ☒ | MATERIAL |  AL |  PC |

** AFFECTS THE LIGHTING PARAMETERS
+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE
(AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

 » PLEASE CONSULT



48V SYSTEM
LINE 48V



		P	CCT	I	Flux	LOR
LINE 500 48V	A376-10- ② -0- N W**	10,5W	2700K	350mA	1500Lm	43%
	A376-10- ② -1- N W**	10,5W	3000K	350mA	1600Lm	43%
	A376-10- ② -2- N W**	10,5W	4000K	350mA	1650Lm	43%
LINE 1000 48V	A376-20- ② -0- N W**	21W	2700K	700mA	3000Lm	43%
	A376-20- ② -1- N W**	21W	3000K	700mA	3200Lm	43%
	A376-20- ② -2- N W**	21W	4000K	700mA	3300Lm	43%
LINE 2000 48V	A376-30- ② -0- N W**	42W	2700K	700mA	6000Lm	43%
	A376-30- ② -1- N W**	42W	3000K	700mA	6400Lm	43%
	A376-30- ② -2- N W**	42W	4000K	700mA	6600Lm	43%

48 V | IP20 | CRI>90 | L80B10 > 60.000h

MacAdam Step 2


OPTIONS*

INCL

TRACK 48V

98°

②	*OPTIONS
1	No DIM
2	DIM DALI

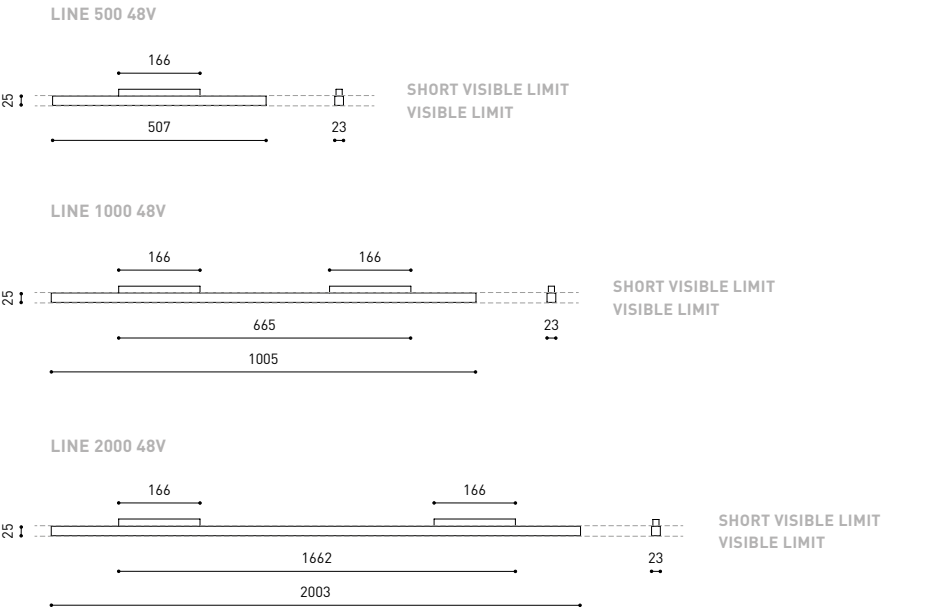

COLOUR | N ■ | W □ | MATERIAL | AL | PC |

** NOT SUGGESTED FOR TRACK 48V SHORT » PLEASE CONSULT

Torres Sarrià | Francesc Rifé Studio | P.A.R. Studio | Photography: David Zarzoso



Templaton Architecture | Photography: Rory Gardiner

48V SYSTEM
BLACK FOSTER MICRO 48V



		P	CCT	I	Flux	LOR
BLACK FOSTER Micro 48V 5	A416-20- 0- N	7W	2700K	500mA	775Lm	87%
	A416-20- 1- N	7W	3000K	500mA	800Lm	87%
	A416-20- 2- N	7W	4000K	500mA	850Lm	87%

48 V | III IP20 | CRI>90 | L90B10 >60.000 h

MacAdam Step 3

OPTIONS*

INCL

TRACK 48V

37°

		P	CCT	I	Flux	LOR
BLACK FOSTER Micro 48V 10	A416-50- 0- N	14W	2700K	500mA	1550Lm	87%
	A416-50- 1- N	14W	3000K	500mA	1600Lm	87%
	A416-50- 2- N	14W	4000K	500mA	1700Lm	87%

48 V | III IP20 | CRI>90 | L90B10 >60.000 h

MacAdam Step 3


OPTIONS*

INCL

TRACK 48V

37°

⓪	OPTIONS*
1	No DIM
2	DIM DALI

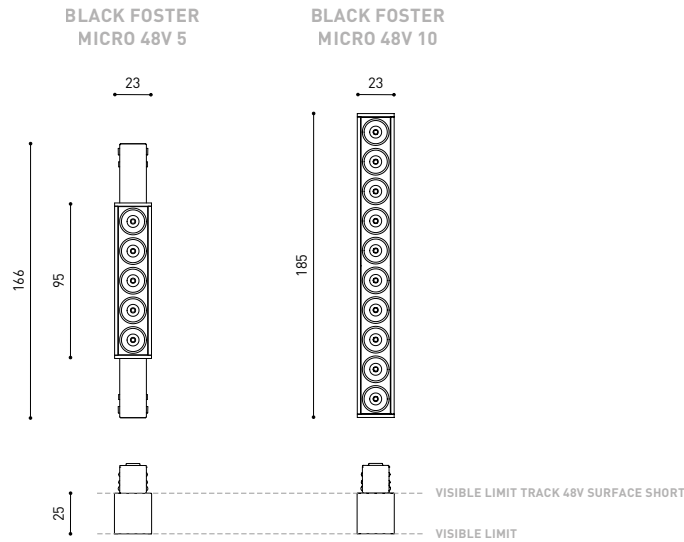

COLOUR | N ■ | MATERIAL | AL | ABS+PC |

» PLEASE CONSULT

48V SYSTEM

STICK 48V



STICK 48V	P	CCT	Beam	I	Flux	LOR
A40- ○ - ○ - ○ -10- WT NT MG WTW NTW MGW	5,6W	2700K	22°	500mA	530Lm	84%
A40- ○ - ○ - ○ -11- WT NT MG WTW NTW MGW	5,6W	3000K	22°	500mA	600Lm	84%
A40- ○ - ○ - ○ -20- WT NT MG WTW NTW MGW	5,6W	2700K	37°	500mA	530Lm	82%
A40- ○ - ○ - ○ -21- WT NT MG WTW NTW MGW	5,6W	3000K	37°	500mA	600Lm	82%
A40- ○ - ○ - ○ -30- WT NT MG WTW NTW MGW	5,6W	2700K	46°	500mA	530Lm	81%
A40- ○ - ○ - ○ -31- WT NT MG WTW NTW MGW	5,6W	3000K	46°	500mA	600Lm	81%

48 V

 IP20


 CRI>90

 L80B10
> 60.000 h

 MacAdam
Step 2

 OPTIONS*

 INCL

 TRACK 48V


 22° / 37° / 46°

○	STICK LENGTH	○	CORD LENGHT-L	○	OPTIONS*
7	STICK 22 220 mm	0	2 m	1	No DIM
8	STICK 44 440 mm	2	5 m	2	DIM DALI
9	STICK 66 660 mm				


OPTIONAL ACCESSORY

Cord Accessory

0223-00-00- | N |



FINISHING	Lamp	Adaptor
WT	WT □ N ■	
NT	NT ■ N ■	
MG	MG ■ N ■	
WTW	WT □ W □	
NTW	NT ■ W □	
MGW	MG ■ W □	

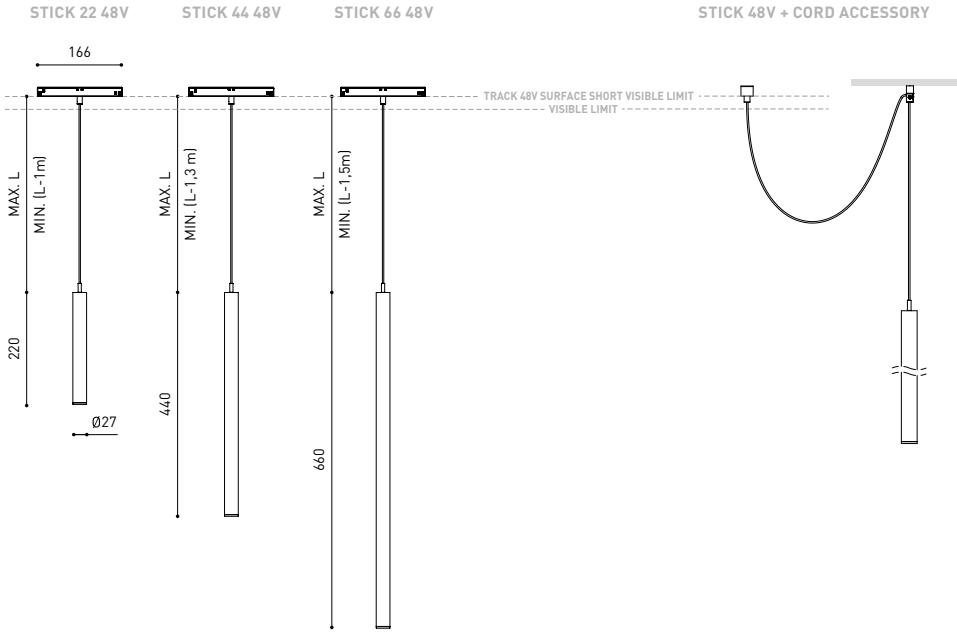

COLOUR | WT □ | NT ■ | MG ■ | W □ | N ■ | MATERIAL | AL | ABS+PC |

«» » PLEASE CONSULT





Arkosight Stand, Euroluca 2019, Milano (Italy) | Francesco Rife Studio | Photography: Alfonso Calza

48V SYSTEM
HOLLY 48V



HOLLY 48V	P	CCT	Beam	I	Flux	LOR
A349- ∅ -1-00- WT NT MC MG WTW NTW MCW MGW	2,1W	2700K	19°	700mA	190Lm	90%
A349- ∅ -1-01- WT NT MC MG WTW NTW MCW MGW	2,1W	3000K	19°	700mA	210Lm	90%
A349- ∅ -1-10- WT NT MC MG WTW NTW MCW MGW	2,1W	2700K	38°	700mA	190Lm	92%
A349- ∅ -1-11- WT NT MC MG WTW NTW MCW MGW	2,1W	3000K	38°	700mA	210Lm	92%
A349- ∅ -2-00- WT NT MC MG WTW NTW MCW MGW	2,1W	2700K	19°	700mA	190Lm	90%
A349- ∅ -2-01- WT NT MC MG WTW NTW MCW MGW	2,1W	3000K	19°	700mA	210Lm	90%
A349- ∅ -2-10- WT NT MC MG WTW NTW MCW MGW	2,1W	2700K	38°	700mA	190Lm	92%
A349- ∅ -2-11- WT NT MC MG WTW NTW MCW MGW	2,1W	3000K	38°	700mA	210Lm	92%

48 V | IP20 | CRI>90 | L80B10 > 60.000h

MacAdam Step 3

INCL

TRACK 48V

19° / 38°

∅	SUSPENSION DISTANCE
0	2 m
1	3 m
2	5 m


ADJUSTMENT RANGE 2m

OPTIONAL ACCESSORY

Cord Accessory

0223-00-00- | W | N |

FINISHING	Lamp	Adaptor	Cord
WT	WT	N	W
NT	NT	N	N
MC	MC	N	N
MG	MG	N	N
WTW	WT	W	W
NTW	NT	W	N
MCW	MC	W	W
MGW	MG	W	W

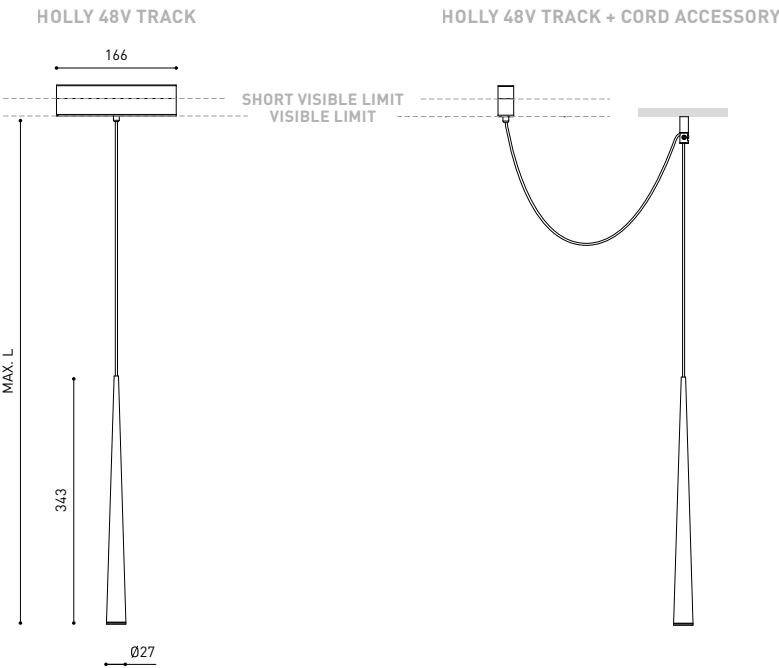

COLOUR | WT | NT | MC | MG | W | N

MATERIAL | AL | ABS


» PLEASE CONSULT



Vivienda Oiel | Studio PSD | Photography: David Zarzoso

48V SYSTEM
SPIN 48V



SPIN 48V											P	CCT	Beam	I	Flux	LOR										
 DALI	A350-	⌀	-1-00-		WT		NT		MC		MG		WTW		NTW		MCW		MGW		6,5W	2700K	24°	700mA	600Lm	86%
	A350-	⌀	-1-01-		WT		NT		MC		MG		WTW		NTW		MCW		MGW		6,5W	3000K	24°	700mA	630Lm	86%
	A350-	⌀	-1-10-		WT		NT		MC		MG		WTW		NTW		MCW		MGW		6,5W	2700K	40°	700mA	600Lm	84%
	A350-	⌀	-1-11-		WT		NT		MC		MG		WTW		NTW		MCW		MGW		6,5W	3000K	40°	700mA	630Lm	84%
	A350-	⌀	-2-00-		WT		NT		MC		MG		WTW		NTW		MCW		MGW		6,5W	2700K	24°	700mA	600Lm	86%
	A350-	⌀	-2-01-		WT		NT		MC		MG		WTW		NTW		MCW		MGW		6,5W	3000K	24°	700mA	630Lm	86%
	A350-	⌀	-2-10-		WT		NT		MC		MG		WTW		NTW		MCW		MGW		6,5W	2700K	40°	700mA	600Lm	84%
	A350-	⌀	-2-11-		WT		NT		MC		MG		WTW		NTW		MCW		MGW		6,5W	3000K	40°	700mA	630Lm	84%


48 V | IP20 | CRI>90 | L80B10 >60.000h




Ø	SUSPENSION DISTANCE
0	2 m
1	3 m
2	5 m

ADJUSTMENT RANGE 2m

OPTIONAL ACCESSORY	
Cord Accessory	
0223-00-00-	W N





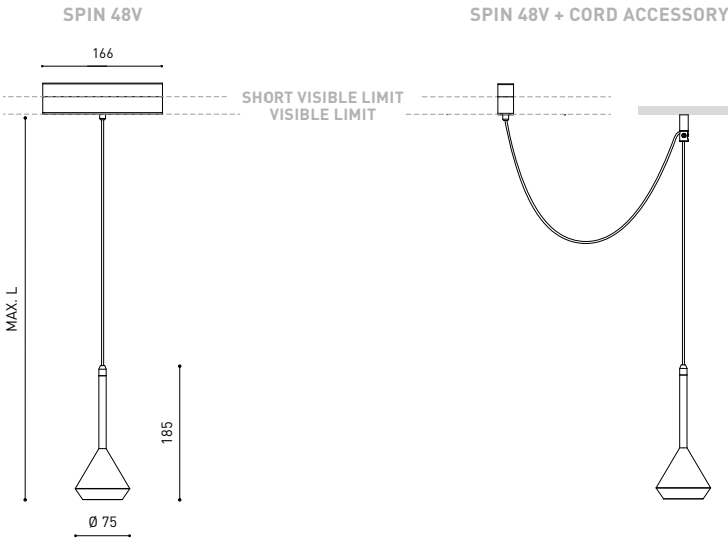

















FINISHING	Lamp	Adaptor	Cord
WT	WT	N	W
NT	NT	N	N
MC	MC	N	N
MG	MG	N	N
WTW	WT	W	W
NTW	NT	W	N
MCW	MC	W	W
MGW	MG	W	W



COLOUR | WT | NT | MC | MG | W | N | MATERIAL | AL | PMMA |







» PLEASE CONSULT

Glossario

P	Potenza		Classe III
CCT	Temperatura di colore		Stabilità cromatica: Step MacAdam
I	Intensità di corrente		Dimmerabile
Flux	Flusso luminoso lordo		Alimentatore non compreso
L	Lunghezza (in mm).		Alimentatore elettronico compreso
AL	Alluminio		Rifrattore ellittico
PC	Policarbonato		Diffusore di fascio luminoso misto
ABS	Acrilonitrile Butadiene Stirene		Diffusore
LOR	<i>Lumen Output Ratio</i> . Relazione tra il flusso di uscita dell'apparecchio e il flusso di uscita della sorgente luminosa		Tipo de binario
IPXX	Indice di sigillatura		Controllo con bluetooth
CRI	Indice rendering di colore		Tipo d'impianto e direzione del fascio
GL	Vetro		Comfort visivo. UGR (<i>Unified Glare Rating</i>)
PMMA	Polimetilmetacrilato		Fabbricato in
TRANS	Transparente		Verro ottico
	Lampada LED		Angolo di inclinazione
48V	Tensione di alimentazione della lampada 48vdc		Riflettore
	Segno CE		Angolo di rotazione
	Certificato ENEC		

Colori

I valori di illuminazione indicati per ogni codice di riferimento corrispondono ai risultati ottenuti nelle prove realizzate sul primo colore menzionato nell'elenco.

	N Nero opaco = RAL 9005
	NT Nero testurizzato = RAL 9005
	B Bianco = RAL 9016
	WT Bianco testurizzato = RAL 9016
	MG Oro metallizzato*
	MC Rame metallizzato*

*RAL non disponibile. Pittura con nanoparticelle metalliche.

Special LED

FOR COMMERCIAL PRODUCT SHOWCASING

Arkoslight offre su alcuni dei suoi prodotti la possibilità di dotarli di un LED speciale per illuminazione orientata alla promozione visiva di beni e prodotti a scopo commerciale.

Si tratta di un LED ad alta cromaticità che mette in rilievo le tonalità che favoriscono la percezione psicologica positiva dell'oggetto illuminato.

Questa sorgente di luce LED speciale offre una gamma di colori più attraenti e intensi, superiore a quella che può offrire un LED convenzionale. Ciò si ottiene grazie alla configurazione del LED secondo un "parametro speciale di saturazione" che fa in modo che i colori e la texture degli oggetti appaiano più attraenti all'interno dello spettro di luce visibile. A tale scopo si seleziona, in ciascun caso, l'apposito COB e il suo fosforo di rivestimento specifico.

ARKOSLIGHT®

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com
France: +33 182 885 200 · Italia: +39 02 9475 0007
Deutschland: +49 22 182 829 313





LIGHT&LIFE
— DESDE 1984 —